



Individually Shielded Cable Characteristics

Attenuation

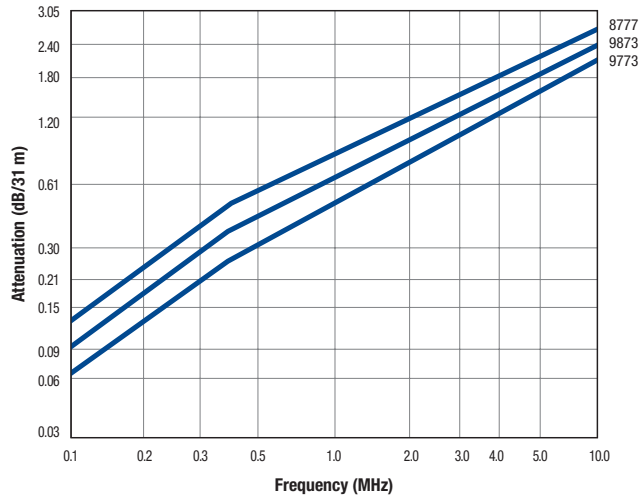


Rise Time

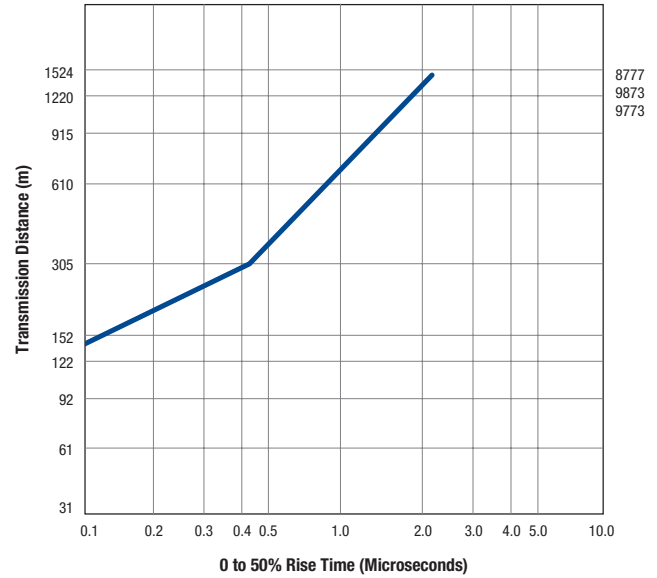

Recommended for audio, pulse, and radio frequency applications requiring superior circuit isolation.

Bit Rate

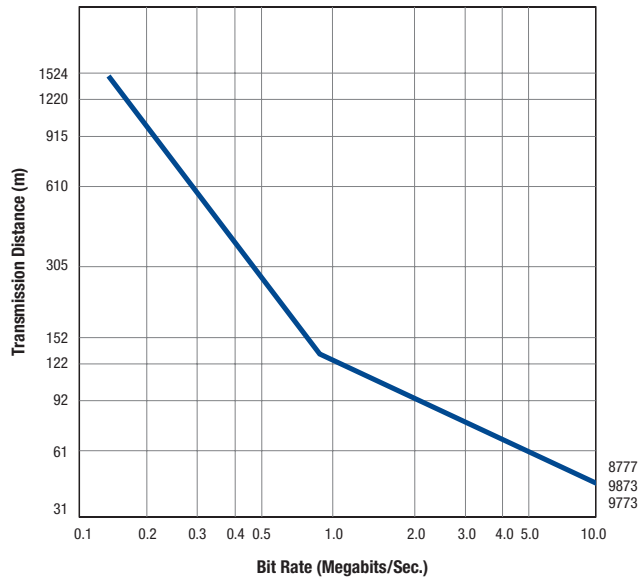

Insulation resistance between shields:

100 megohms/M' nom.

Capacitance between adjacent shields:

377 pF/m nom.

Working voltage between adjacent shields:

50 volt max.