

# Selection Guide

Shielded Multi-Pair Computer Cables  
RS-232, RS-422, and RS-485 Applications\*

Specifications		Cable Series**																	
		9804	8132	9829	8332	9501	8102	9729	8162	9990	9841	9680	9302*	8302	8777	9873	9773	8132FO	1419A
<b>Conductor Size:</b> (AWG)	28	✓	✓															✓	
	24			✓	✓	✓	✓	✓	✓	✓	✓								✓
	22											✓	✓	✓					
	20															✓			
	18																✓		
Page No.		5.26	5.27	5.30	5.29	5.11	5.31	5.35	5.44	5.37	5.28	5.15	5.17	5.32	5.40	5.42	5.42	5.14	5.15
<b>Insulation:</b>	S-R PVC				✓	✓							✓						
	Polyethylene			✓						✓	✓	✓				✓	✓		
	Polypropylene	✓													✓				
	Datalene®†		✓				✓	✓	✓									✓	✓
<b>Shield:</b>	Overall Foil					✓						✓	✓					✓	✓
	Individual Foil							✓	✓	✓				✓	✓	✓			
	Overall Foil/Braid	✓	✓	✓	✓		✓		✓		✓			✓					
	Braid Coverage	90%	65%	65%	65%		65%		65%		90%			65%					
<b>Drain Wire:</b> (see key below)		●	●	●	×	●	●	▲	▲	▲	●	●	●	×	▲	▲	▲	●	●
<b>No. of Pairs Available:</b>	1					✓					✓								
	2	✓	✓	✓	✓	✓	✓	✓	✓		✓		✓	✓				✓	✓
	3	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
	4	✓	✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓				✓	✓
	5	✓	✓	✓	✓	✓	✓		✓				✓					✓	✓
	6			✓	✓	✓	✓	✓	✓	✓		✓	✓	✓	✓	✓	✓		✓
	7	✓		✓	✓	✓	✓		✓				✓						
	8		✓			✓	✓		✓					✓					✓
	9	✓		✓		✓		✓		✓		✓	✓		✓	✓	✓		
	10			✓	✓	✓	✓		✓					✓					
	11								✓						✓	✓			
	12	✓		✓					✓		✓				✓	✓	✓		
	12.5		✓		✓		✓					✓		✓				✓	✓
	13	✓																	
	15				✓	✓	✓	✓	✓				✓	✓	✓	✓	✓		✓
	17								✓						✓				
	18	✓	✓	✓	✓		✓		✓					✓					✓
	19					✓			✓				✓		✓				
	25	✓	✓	✓	✓	✓	✓		✓	✓				✓					✓
	27								✓				✓		✓				
31	✓																		
37														✓					
50					✓														
<b>Capacitance †† (pF/ft.)</b>		15.5	11.0	15.5	30.0	30.0	12.5	12.5	12.5	25.0	12.8	15.5	35.0	35.0	30.0	30.0	30.0	11.0	13.0

S-R = Semi-rigid

\* Refer to specifications for recommendations.  
 \*\* All cables are UL-listed.  
 † Foam high density polyethylene.  
 †† Capacitance may vary on some cables.  
 ♦ Standard PVC Insulation, solid conductors.

**Drain Wire Key:**

- = Drain wire overall.
- ▲ = Drain wire each pair.
- × = No drain wire.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com


Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr

# Overall Beldfoil® Shield

High-Temperature Control and Instrumentation Cables and Computer Cables for EIA RS-232 Applications


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**20 AWG Stranded (7x28) TC Conductors • Pairs Cabled Together • Overall Beldfoil® Shield (100% Coverage) • Drain Wire**

<b>Tefzel® Insulation • Clear Tefzel Jacket</b>																			
<b>High-Temperature</b> 300V RMS, 150°C VW-1	<b>85164</b>	4	See Chart 3 (Tech Info Section)	100	30.5	6.6	3.0	.015	.38	.025	.64	.344	8.74	23	75	40	131		
				500†	152.4	37.0	16.8												
				1000†	304.8	71.0	32.3												
	<b>85168</b>	8	See Chart 3 (Tech Info Section)	100	30.5	11.5	5.2	.015	.38	.025	.64	.439	11.15	23	75	40	131		
				500†	152.4	62.0	28.2												
				1000†	304.8	126.0	57.3												

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire**

<b>Semi-rigid PVC Insulation • Chrome PVC Jacket</b>																			
<b>UL AWM Style 2464</b> (300V 80°C) CSA AWM I A	<b>9501</b>	NEC: 1	See Chart 3 (Tech Info Section)	100	30.5	2.1	1.0	24.0Ω/M'	18.0Ω/M'	.156	3.96	75	60%	40	131	74	243		
				U-500	U-152.4	7.5	3.4	78.7Ω/km	59.1Ω/km										
				500	152.4	7.0	3.2												
				1000	304.8	14.0	6.4												
	<b>9502††</b>	NEC: 2	See Chart 3 (Tech Info Section)	100	30.5	3.7	1.7	24.0Ω/M'	17.0Ω/M'	.222	5.64	75	60%	30	98	50	164		
				U-500	U-152.4	15.0	6.8	78.7Ω/km	55.8Ω/km										
				500	152.4	14.5	6.6												
				1000	304.8	30.0	13.6												
Shorting Fold P-MSHA-SC-7K-182037	<b>9503</b>	NEC: 3	See Chart 3 (Tech Info Section)	100	30.5	3.4	1.5	24.0Ω/M'	17.0Ω/M'	.232	5.89	75	60%	30	98	50	164		
				U-500	U-152.4	15.0	6.8	78.7Ω/km	55.8Ω/km										
				500	152.4	14.5	6.6												
				1000	304.8	30.0	13.6												
<b>9504</b>	NEC: 4	See Chart 3 (Tech Info Section)	See Chart 3 (Tech Info Section)	100	30.5	4.0	1.8	24.0Ω/M'	17.0Ω/M'	.265	6.73	75	60%	30	98	50	164		
				U-500	U-152.4	18.0	8.2	78.7Ω/km	55.8Ω/km										
				500	152.4	16.5	7.5												
				1000	304.8	36.0	16.3												
<b>9505</b>	NEC: 5	See Chart 3 (Tech Info Section)	See Chart 3 (Tech Info Section)	100	30.5	4.7	2.1	24.0Ω/M'	17.0Ω/M'	.289	7.34	75	60%	30	98	50	164		
				U-500	U-152.4	21.5	9.8	78.7Ω/km	55.8Ω/km										
				500	152.4	23.0	10.4												
				1000	304.8	43.0	19.5												

DCR = DC Resistance • TC = Tinned Copper

\* Capacitance between conductors.

\*\* Capacitance between one conductor and other conductors connected to shield.

† Spools are one piece, but length may vary ±10% from length shown.

†† Pennsylvania Department of Environmental Resources and United States Mine Safety and Health Administration certification. Request quotations of RG/U cables not listed.

See Attenuation, Rise Time and Bit Rate data for this series on page 5.10.

Tefzel is a DuPont trademark.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr




# Overall Beldfoil® Shield

Computer Cables for EIA RS-232 Applications  
 Plenum-Rated


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire**

**Plenum • FEP Insulation • Natural Flamarrest® Jacket**

	300V RMS	<b>82641</b>	NEC: CMP CEC: CMP FT6	1	See Chart 3 (Tech Info Section)	U-1000† 1000†	U-304.8 304.8	9.0 8.0	4.1 3.6	.006 .15	.15 .014	.36 .36	.106 2.69	31	102	59	194
		<b>82502</b>	NEC: CMP CEC: CMP FT6	2	See Chart 3 (Tech Info Section)	U-500† U-1000†	U-152.4 U-304.8	8.0 16.0	3.6 7.3	.006 .15	.15 .014	.36 .36	.162 4.11	25	82	45	148
		<b>82503</b>	NEC: CMP CEC: CMP FT6	3	See Chart 3 (Tech Info Section)	U-1000† 1000†	U-304.8 304.8	19.0 18.0	8.6 8.2	.006 .15	.15 .014	.36 .36	.169 4.29	25	82	45	148
		<b>82504</b>	NEC: CMP CEC: CMP FT6	4	See Chart 3 (Tech Info Section)	U-1000† 1000†	U-304.8 304.8	24.0 26.0	10.9 11.8	.006 .15	.15 .014	.36 .36	.193 4.90	25	82	45	148
		<b>82505</b>	NEC: CMP CEC: CMP FT6	5	See Chart 3 (Tech Info Section)	U-1000† 1000†	U-304.8 304.8	29.0 31.0	13.2 14.0	.006 .15	.15 .015	.38 .38	.196 4.98	25	82	45	148
		<b>82506</b>	NEC: CMP CEC: CMP FT6	6	See Chart 3 (Tech Info Section)	U-500† U-1000†	U-152.4 U-304.8	17.5 34.0	8.0 15.5	.006 .15	.15 .015	.38 .38	.209 5.31	25	82	45	148
		<b>82509</b>	NEC: CMP CEC: CMP FT6	9	See Chart 3 (Tech Info Section)	1000†	304.8	49.0	22.3	.006 .15	.15 .015	.38 .38	.246 6.25	23	75	42	138

**Plenum • FEP Insulation • Red FEP Jacket**

	300V RMS	<b>88641</b>	NEC: CMP CEC: CMP FT6	1	See Chart 3 (Tech Info Section)	100 500† 1000†	30.5 152.4 304.8	2.4 6.0 9.0	1.1 2.7 4.1	.006 .15	.15 .014	.36 .36	.106 2.69	31	102	59	194
		<b>89503</b>	NEC: CMP CEC: CMP FT6	3	See Chart 3 (Tech Info Section)	100 500† 1000†	30.5 152.4 304.8	4.0 10.5 21.0	1.8 4.8 9.5	.006 .15	.15 .014	.36 .36	.175 4.45	21	69	40	131
		<b>89504</b>	NEC: CMP CEC: CMP FT6	4	See Chart 3 (Tech Info Section)	500† 1000†	152.4 304.8	13.0 29.0	6.0 13.1	.006 .15	.15 .014	.36 .36	.192 4.88	21	69	40	131
		<b>89505</b>	NEC: CMP CEC: CMP FT6	5	See Chart 3 (Tech Info Section)	100 1000†	30.5 304.8	4.9 33.0	2.2 15.0	.006 .15	.15 .014	.36 .36	.197 5.00	21	69	40	131

TC = Tinned Copper


\* Capacitance between conductors.

\*\* Capacitance between one conductor and other conductors connected to shield.

† Spools and/or UnReel® cartons are one piece, but length may vary ±10% for spools and ±5% for UnReel from length shown.

# Overall Beldfoil® Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-485 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>28 AWG Stranded (7x36) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 28 AWG Stranded TC Drain Wire</b>																		
<b>Datalene® Insulation • Chrome PVC Jacket</b>																		
 <p>Z-Fold®</p>	UL AWM Style 2919 (30V 80°C)	<b>8132FO</b>	NEC: CL2	2	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	8.5 20.0	3.9 9.1	65.0Ω/M' 213.0Ω/km	23.1Ω/M' 75.8Ω/km	.215 5.46	120	78%	11.0	36.1	20.0	65.6
	<b>8133FO</b>	NEC: CL2	3	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	11.0 20.0	5.0 9.1	65.0Ω/M' 213.0Ω/km	23.1Ω/M' 75.8Ω/km	.250 6.35	120	78%	11.0	36.1	20.0	65.6	
	<b>8134FO</b>	NEC: CL2	4	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	13.5 31.0	6.1 14.1	65.0Ω/M' 213.0Ω/km	20.0Ω/M' 65.6Ω/km	.270 6.86	120	78%	11.0	36.1	20.0	65.6	
	<b>8135FO</b>	NEC: CL2	5	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	14.0 32.0	6.4 14.5	65.0Ω/M' 213.0Ω/km	20.0Ω/M' 65.6Ω/km	.280 7.11	120	78%	11.0	36.1	20.0	65.6	
	<b>8138FO</b>	NEC: CL2	8	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	22.0 42.0	10.0 19.1	65.0Ω/M' 213.0Ω/km	17.7Ω/M' 58.1Ω/km	.310 7.88	120	78%	11.0	36.1	20.0	65.6	
	<b>8142FO</b>	NEC: CL2	12.5 (12 pairs + 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	27.5 54.0	12.5 24.5	65.0Ω/M' 213.0Ω/km	17.7Ω/M' 58.1Ω/km	.385 9.78	120	78%	11.0	36.1	20.0	65.6	
	<b>8148FO</b>	NEC: CL2	18	See Chart 5 (Tech Info Section)	500	152.4	38.5	17.5	65.0Ω/M' 213.0Ω/km	15.8Ω/M' 51.8Ω/km	.445 11.31	120	78%	11.0	36.1	20.0	65.6	
	<b>8155FO</b>	NEC: CL2	25	See Chart 5 (Tech Info Section)	500	152.4	42.0	19.1	65.0Ω/M' 213.0Ω/km	14.3Ω/M' 4.7Ω/km	.545 13.85	120	78%	11.0	36.1	20.0	65.6	

DCR = DC Resistance • TC = Tinned Copper



\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.

# Overall Beldfoil® Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-422 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire</b>																		
<b>Polyethylene Insulation • Chrome PVC Jacket</b>																		
 UL AWM Style 2919 (30V 80°C)	<b>9680</b>	NEC: CM CEC: CM	3	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	17.0 38.0	7.7 17.3	24.0Ω/M' 78.7Ω/km	14.4Ω/M' 47.2Ω/km	.282 7.16	100	66%	15.5	50.8	27.5	90.2	
	<b>9681</b>	NEC: CM CEC: CM	4	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	24.0 45.0	10.9 20.5	24.0Ω/M' 78.7Ω/km	14.4Ω/M' 47.2Ω/km	.307 7.80	100	66%	15.5	50.8	27.5	90.2	
	<b>9682</b>	NEC: CM CEC: CM	6	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	29.5 56.0	13.4 25.5	24.0Ω/M' 78.7Ω/km	13.1Ω/M' 43.0Ω/km	.342 8.69	100	66%	15.5	50.8	27.5	90.2	
	<b>9683</b>	NEC: CM CEC: CM	9	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	38.0 79.0	17.2 35.9	24.0Ω/M' 78.7Ω/km	12.0Ω/M' 39.4Ω/km	.397 10.10	100	66%	15.5	50.8	27.5	90.2	
	<b>9684</b>	NEC: CM CEC: CM	12.5 (12 prs.+ 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	49.5 97.0	22.6 44.1	24.0Ω/M' 78.7Ω/km	12.0Ω/M' 39.4Ω/km	.445 11.30	100	66%	15.5	50.8	27.5	90.2	
<b>Datalene® Insulation • Chrome PVC Jacket</b>																		
 UL AWM Style 2919 (30V 80°C)	<b>1419A</b>	NEC: CM CEC: CM FT1	2	See Chart 5 (Tech Info Section)	500 1000 10000	152.4 304.8 3048.0	13.5 30.0 310.0	6.1 13.6 140.9	24.0Ω/M' 78.7Ω/km	15.1Ω/M' 49.5Ω/km	.248 6.30	100	78%	13	42.7	22	72	
	<b>1420A</b>	NEC: CM CEC: CM FT 1	3	See Chart 5 (Tech Info Section)	500 1000 10000	152.4 304.8 3048.0	15.0 34.0 340.0	6.8 15.5 154.5	24.0Ω/M' 78.7Ω/km	15.1Ω/M' 49.5Ω/km	.261 6.63	100	78%	13	42.7	22	72	
	<b>1421A</b>	NEC: CM CEC: CM	4	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	16.5 37.0	7.5 16.8	24.0Ω/M' 78.7Ω/km	14.4Ω/M' 47.2Ω/km	.280 7.11	100	78%	13	42.7	22	72	
	<b>1422A</b>	NEC: CM CEC: CM	5	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	23.0 43.0	10.5 19.5	24.0Ω/M' 78.7Ω/km	14.4Ω/M' 47.2Ω/km	.294 7.47	100	78%	13	42.7	22	72	
	<b>1423A</b>	NEC: CM CEC: CM	6	See Chart 5 (Tech Info Section)	500 1000 10000	152.4 304.8 3048.0	25.0 48.0 500.0	11.4 21.8 227.3	24.0Ω/M' 78.7Ω/km	13.0Ω/M' 42.7Ω/km	.319 8.10	100	78%	13	42.7	22	72	
	<b>1424A</b>	NEC: CM CEC: CM	12.5 (12 prs.+ 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	43.0 85.0	19.5 38.6	24.0Ω/M' 78.7Ω/km	13.0Ω/M' 42.7Ω/km	.418 10.62	100	78%	13	42.7	22	72	
<b>1425A</b>	NEC: CM CEC: CM	15	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	53.0 99.0	24.1 45.0	24.0Ω/M' 78.7Ω/km	11.2Ω/M' 36.7Ω/km	.473 12.01	100	78%	13	42.7	22	72		

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.




For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr

# Overall Foil/Braid Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-422 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>28 AWG Stranded (7x36) TC Conductors • Overall Beldfoil® (100% Coverage) + TC Braid Shield (90% Coverage) • 28 AWG Stranded TC Drain Wire</b>																		
<b>Polypropylene Insulation • Chrome PVC Jacket</b>																		
	UL AWM Style 2960 (30V 60°C)	<b>9804</b>	NEC: CL2	2	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	3.9 14.5 32.0	1.8 6.6 14.5	64.9Ω/M' 212.9Ω/km	4.9Ω/M' 16.1Ω/km	.214 5.44	100	66%	15.5	50.9	27.5	90.2
	<b>9805</b>	NEC: CL2	3	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	4.2 15.5 35.0	1.9 7.0 15.9	64.9Ω/M' 212.9Ω/km	4.2Ω/M' 13.8Ω/km	.222 5.64	100	66%	15.5	50.9	27.5	90.2	
	<b>9806</b>	NEC: CL2	4	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	4.3 17.5 39.0	2.0 7.9 17.7	64.9Ω/M' 212.9Ω/km	4.0Ω/M' 13.1Ω/km	.237 6.02	100	66%	15.5	50.9	27.5	90.2	
	<b>9807</b>	NEC: CL2	5	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	4.3 18.0 39.0	2.0 8.2 17.7	64.9Ω/M' 212.9Ω/km	4.2Ω/M' 13.8Ω/km	.240 6.10	100	66%	15.5	50.9	27.5	90.2	
	<b>9808</b>	NEC: CL2	7	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	4.9 20.5 44.0	2.2 9.3 20.0	64.9Ω/M' 212.9Ω/km	3.7Ω/M' 12.1Ω/km	.256 6.50	100	66%	15.5	50.9	27.5	90.2	
	<b>9809</b>	NEC: CL2	9	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	5.7 25.0 53.0	2.6 11.3 24.1	64.9Ω/M' 212.9Ω/km	3.1Ω/M' 10.2Ω/km	.290 7.37	100	66%	15.5	50.9	27.5	90.2	
	<b>9812</b>	NEC: CL2	12	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	6.7 31.0 62.0	3.0 14.1 28.2	64.9Ω/M' 212.9Ω/km	2.8Ω/M' 9.2Ω/km	.319 8.10	100	66%	15.5	50.9	27.5	90.2	
	<b>9813</b>	NEC: CL2	13	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	7.0 34.0 66.0	3.2 15.5 30.0	64.9Ω/M' 212.9Ω/km	2.2Ω/M' 7.2Ω/km	.336 8.53	100	66%	15.5	50.9	27.5	90.2	
	<b>9819</b>	NEC: CL2	18	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	8.3 41.0 82.0	3.8 18.6 37.3	64.9Ω/M' 212.9Ω/km	2.0Ω/M' 6.7Ω/km	.365 9.27	100	66%	15.5	50.9	27.5	90.2	
	<b>9825</b>	NEC: CL2	25	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	9.9 54.5 108.0	4.5 24.8 49.1	64.9Ω/M' 212.9Ω/km	1.9Ω/M' 6.2Ω/km	.429 10.90	100	66%	15.5	50.9	27.5	90.2	
<b>9814</b>	NEC: CL2	31	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	11.8 64.0 127.0	5.4 29.1 57.7	64.9Ω/M' 212.9Ω/km	2.1Ω/M' 6.9Ω/km	.462 11.73	100	66%	15.5	50.9	27.5	90.2		


DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

## Overall Foil/Braid Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-485 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>28 AWG Stranded (7x36) TC Conductors • Overall Beldfoil® (100% Coverage) + TC Braid Shield (65% Coverage) • 28 AWG Stranded TC Drain Wire</b>																		
<b>Datalene® Insulation • Chrome PVC Jacket</b>																		
 <p>Shorting Fold</p>	8132	NEC: CL2	2	See Chart 5 (Tech Info Section)	100	30.5	3.6	1.6	65.0Ω/M'	5.1Ω/M'	.220	5.59	120	78%	11.0	36.1	20.0	65.6
					500	152.4	14.5	6.6	213.0Ω/km	16.6Ω/km								
					1000	304.8	29.0	13.2										
	8133	NEC: CL2	3	See Chart 5 (Tech Info Section)	100	30.5	3.8	1.7	65.0Ω/M'	5.2Ω/M'	.270	6.86	120	78%	11.0	36.1	20.0	65.6
					500	152.4	15.0	6.8	213.0Ω/km	17.1Ω/km								
					1000	304.8	34.0	15.5										
	8134	NEC: CL2	4	See Chart 5 (Tech Info Section)	100	30.5	4.3	2.0	65.0Ω/M'	4.4Ω/M'	.290	7.37	120	78%	11.0	36.1	20.0	65.6
					500	152.4	18.0	8.2	213.0Ω/km	14.3Ω/km								
					1000	304.8	39.0	17.7										
	8135	NEC: CL2	5	See Chart 5 (Tech Info Section)	100	30.5	4.6	2.1	65.0Ω/M'	4.2Ω/M'	.300	7.62	120	78%	11.0	36.1	20.0	65.6
500					152.4	22.0	9.1	213.0Ω/km	13.8Ω/km									
1000					304.8	42.0	19.1											
8138	NEC: CL2	8	See Chart 5 (Tech Info Section)	100	30.5	5.6	2.5	65.0Ω/M'	3.7Ω/M'	.330	8.38	120	78%	11.0	36.1	20.0	65.6	
				500	152.4	27.0	12.3	213.0Ω/km	12.3Ω/km									
				1000	304.8	52.0	23.6											
8142	NEC: CL2	12.5 (12 pairs + 1 single)	See Chart 5 (Tech Info Section)	100	30.5	6.8	3.1	65.0Ω/M'	3.1Ω/M'	.375	9.53	120	78%	11.0	36.1	20.0	65.6	
				500	152.4	33.0	15.0	213.0Ω/km	10.1Ω/km									
				1000	304.8	66.0	29.9											
8148	NEC: CL2	18	See Chart 5 (Tech Info Section)	100	30.5	8.5	3.9	65.0Ω/M'	2.6Ω/M'	.465	11.81	120	78%	11.0	36.1	20.0	65.6	
				500	152.4	47.5	21.6	213.0Ω/km	8.4Ω/km									
				1000	304.8	92.0	41.8											
8155	NEC: CL2	25	See Chart 5 (Tech Info Section)	100	30.5	11.1	5.0	65.0Ω/M'	2.3Ω/M'	.565	14.35	120	78%	11.0	36.1	20.0	65.6	
				500	152.4	64.0	29.1	213.0Ω/km	7.6Ω/km									
				1000	304.8	121.0	55.0											

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.











\*\*Capacitance between one conductor and other conductors connected to shield.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.



# Overall Foil/Braid Shield

Low-Capacitance Computer Cables for EIA RS-485 Applications  
Plenum-Rated and Non-Plenum

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance									
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m						
<b>24 AWG Stranded (7x32) TC Conductors • Overall Beldfoil® (100% Coverage) + TC Braid Shield (90% Coverage) • 24 AWG Stranded TC Drain Wire</b>																								
<b>Polyethylene Insulation • Chrome PVC Jacket</b>																								
 UL AWM Style 2919 (30V 80°C) <b>DMX 512</b>	<b>9841</b>	NEC:	1	See Chart 5 (Tech Info Section)	100	30.5	4.3	2.0	24.0Ω/M'	3.4Ω/M'	.232	5.89	120	66%	12.8	42.0	23.0	75.5						
		CM			500	152.4	20.0	9.1	78.7Ω/km	11.0Ω/km	For Plenum versions of 9841, see 82841 or 89841.													
		CEC:			1000	304.8	40.0	18.2																
		CM																						
	<b>9842</b>	NEC:	2	See Chart 5 (Tech Info Section)	100	30.5	5.8	2.6	24.0Ω/M'	2.2Ω/M'	.340	8.64	120	66%	12.8	42.0	23.0	75.5						
		CM			500	152.4	29.5	13.4	78.7Ω/km	7.2Ω/km	For Plenum versions of 9842, see 82842.													
		CEC:			1000	304.8	57.0	25.9																
		CM																						
	<b>9843</b>	NEC:	3	See Chart 5 (Tech Info Section)	100	30.5	7.1	3.2	24.0Ω/M'	2.3Ω/M'	.360	9.14	120	66%	12.8	42.0	23.0	75.5						
		CM			500	152.4	34.5	15.7	78.7Ω/km	7.7Ω/km														
		CEC:			1000	304.8	67.0	30.5																
		CM																						
	<b>9844</b>	NEC:	4	See Chart 5 (Tech Info Section)	500	152.4	43.0	19.5	24.0Ω/M'	2.1Ω/M'	.390	9.91	120	66%	12.8	42.0	23.0	75.5						
		CM			1000	304.8	83.0	37.7	78.7Ω/km	6.9Ω/km														
		CEC:																						
		CM																						
<b>Plenum • Foam FEP Insulation • Natural Flamarrest® Jacket</b>																								
 300V RMS	<b>82841</b>	NEC:	1	See Chart 5 (Tech Info Section)	500	152.4	13.0	6.0	24.0Ω/M'	3.1Ω/M'	.204	5.18	120	76%	12	39.4	22	72.2						
		CMP			1000	304.8	26.0	11.8	78.7Ω/km	10.2Ω/km														
		CEC:																						
 300V RMS	<b>82842</b>	NEC:	2	See Chart 5 (Tech Info Section)	500	152.4	19.0	8.6	24.0Ω/M'	2.4Ω/M'	.273	6.93	120	76%	12	39.4	22	72.2						
		CMP			1000	304.8	42.0	19.1	78.7Ω/km	7.9Ω/km														
		CEC:																						
 300V RMS	<b>82842</b>	CMP																						
		CEC:																						
		CMP FT6																						
<b>Plenum • Foam FEP Insulation • Red FEP Jacket</b>																								
 300V RMS	<b>89841</b>	NEC:	1	See Chart 5 (Tech Info Section)	500	152.4	13.5	6.1	24.0Ω/M'	3.1Ω/M'	.202	5.13	120	76%	12	39.4	22	72.2						
		CMP			1000	304.8	27.0	12.3	78.7Ω/km	10.2Ω/km														
		CEC:																						
 300V RMS	<b>89842</b> <small>new</small>	NEC:	2	See Chart 5 (Tech Info Section)	500	152.4	25.5	11.6	24.0Ω/M'	3.1Ω/M'	.305	7.75	120	76%	12	39.4	22	72.2						
		CMP			1000	304.8	49.0	22.2	78.7Ω/km	10.2Ω/km														
		CEC:																						
 300V RMS	<b>89842</b>	CMP																						
		CEC:																						
		CMP FT6																						



DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

# Overall Foil/Braid Shield

## Low-Capacitance Computer Cables for EIA RS-232 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil® (100% Coverage) + TC Braid Shield (65% Coverage)</b>																		
<b>Semi-rigid PVC Insulation • Chrome PVC Jacket</b>																		
UL AWM Style 2464 (300V 80°C) CSA AWM I A	8332	NEC:	2	See	100	30.5	4.1	1.9	24.0Ω/M'	5.4Ω/M'	.250	6.35	75	60%	30	98	50	164
		CMG:		Chart 5	500	152.4	16.5	7.5	78.7Ω/km	17.7Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	37.0	16.8										
		CMG FT4																
 Z-Fold®	8333	NEC:	3	See	100	30.5	4.8	2.2	24.0Ω/M'	6.6Ω/M'	.265	6.73	75	60%	30	98	50	164
		CMG:		Chart 5	500	152.4	20.5	9.3	78.7Ω/km	21.7Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	44.0	20.1										
		CMG FT4																
	8334	NEC:	4	See	100	30.5	5.3	2.4	24.0Ω/M'	4.5Ω/M'	.288	7.32	75	60%	30	98	50	164
		CMG:		Chart 5	500	152.4	22.5	10.2	78.7Ω/km	14.8Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	49.0	22.3										
		CMG FT4																
	8335	NEC:	5	See	100	30.5	6.0	2.7	24.0Ω/M'	4.6Ω/M'	.295	7.49	75	60%	30	98	50	164
		CMG:		Chart 5	500	152.4	29.5	13.4	78.7Ω/km	15.1Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	57.0	25.9										
		CMG FT4																
	8336	NEC:	6	See	100	30.5	6.5	3.0	24.0Ω/M'	4.7Ω/M'	.310	7.87	75	60%	30	98	50	164
		CMG:		Chart 5	500	152.4	31.5	14.3	78.7Ω/km	15.4Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	62.0	28.2										
		CMG FT4																
	8337	NEC:	7	See	100	30.5	6.8	3.1	24.0Ω/M'	4.7Ω/M'	.321	8.15	75	60%	30	98	50	164
		CMG:		Chart 5	500	152.4	33.0	14.9	78.7Ω/km	15.4Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	65.0	29.5										
		CMG FT4																
	8340	NEC:	10	See	100	30.5	9.1	4.1	24.0Ω/M'	3.5Ω/M'	.385	9.78	75	60%	30	98	50	164
		CMG:		Chart 5	500	152.4	43.5	19.7	78.7Ω/km	11.5Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	90.0	40.9										
		CMG FT4																
	8342	NEC:	12.5	See	100	30.5	11.0	5.0	24.0Ω/M'	3.6Ω/M'	.405	10.29	75	60%	30	98	50	164
		CMG:		(12 pairs + 1 single) Chart 5	500	152.4	55.0	25.0	78.7Ω/km	11.8Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	109.0	49.5										
		CMG FT4																
	8345	NEC:	15	See	500	152.4	61.5	28.0	24.0Ω/M'	3.2Ω/M'	.445	11.30	75	60%	30	98	50	164
		CMG:		Chart 5	1000	304.8	123.0	55.9	78.7Ω/km	10.5Ω/km								
		CEC:		(Tech Info Section)														
		CMG FT4																
UL AWM Style 2464 (300V 80°C)	8348	NEC:	18	See	100	30.5	14.2	6.4	24.0Ω/M'	2.7Ω/M'	.480	12.19	75	60%	30	98	50	164
		CMG:		Chart 5	500	152.4	78.5	35.8	78.7Ω/km	8.9Ω/km								
		CEC:		(Tech Info Section)	1000	304.8	152.0	69.3										
		CMG FT4																
	8355	NEC:	25	See	500	152.4	96.5	43.9	24.0Ω/M'	2.5Ω/M'	.550	13.97	75	60%	30	98	50	164
		CMG:		Chart 5	1000	304.8	195.0	88.6	78.7Ω/km	8.2Ω/km								
		CEC:		(Tech Info Section)														
		CMG FT4																


DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

# Overall Foil/Braid Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-422 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil® (100% Coverage) + TC Braid Shield (65% Coverage) • TC Drain Wire†</b>																		
<b>Polyethylene Insulation • Chrome PVC Jacket</b>																		
 <p>UL AWM Style 2919 (30V 80°C)</p> <p>Z-Fold®</p>	<b>9829</b>	NEC: CM CEC: CM	2	See Chart 5 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	4.7 22.0 43.0	2.1 10.0 19.5	24.0Ω/M' 78.7Ω/km	4.4Ω/M' 14.4Ω/km	.291 7.39	100	66%	15.5	50.9	27.5	90.2	
	<b>9830</b>	NEC: CM CEC: CM	3	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	26.5 53.0	12.0 24.1	24.0Ω/M' 78.7Ω/km	4.4Ω/M' 14.4Ω/km	.305 7.74	100	66%	15.5	50.9	27.5	90.2	
	<b>9831</b>	NEC: CM CEC: CM	4	See Chart 5 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	6.2 30.0 58.0	2.8 13.6 26.4	24.0Ω/M' 78.7Ω/km	3.9Ω/M' 12.8Ω/km	.330 8.38	100	66%	15.5	50.9	27.5	90.2	
	<b>9832</b>	NEC: CM CEC: CM	5	See Chart 5 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	6.6 32.5 65.0	3.0 14.8 29.5	24.0Ω/M' 78.7Ω/km	3.9Ω/M' 12.8Ω/km	.338 8.59	100	66%	15.5	50.9	27.5	90.2	
	<b>9839</b>	NEC: CM CEC: CM	6	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	35.5 69.0	16.1 31.4	24.0Ω/M' 78.7Ω/km	2.1Ω/M' 6.9Ω/km	.364 9.25	100	66%	15.5	50.9	27.5	90.2	
	<b>9833</b>	NEC: CM CEC: CM	7	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	38.5 77.0	17.5 35.0	24.0Ω/M' 78.7Ω/km	3.7Ω/M' 12.1Ω/km	.370 9.40	100	66%	15.5	50.9	27.5	90.2	
	<b>9834</b>	NEC: CM CEC: CM	9	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	47.0 93.0	21.4 42.3	24.0Ω/M' 78.7Ω/km	3.0Ω/M' 9.8Ω/km	.419 10.64	100	66%	15.5	50.9	27.5	90.2	
	<b>9835</b>	NEC: CM CEC: CM	10	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	51.5 102.0	23.4 46.4	24.0Ω/M' 78.7Ω/km	2.8Ω/M' 9.2Ω/km	.451 11.46	100	66%	15.5	50.9	27.5	90.2	
	<b>9836</b>	NEC: CM CEC: CM	12	See Chart 5 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	10.4 57.0 114.0	4.7 25.9 51.8	24.0Ω/M' 78.7Ω/km	2.8Ω/M' 9.2Ω/km	.464 11.79	100	66%	15.5	50.9	27.5	90.2	
	<b>9837</b>	NEC: CM CEC: CM	18	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	87.5 174.0	39.8 79.1	24.0Ω/M' 78.7Ω/km	2.0Ω/M' 6.6Ω/km	.567 14.40	100	66%	15.5	50.9	27.5	90.2	
<b>9838</b>	NEC: CM CEC: CM	25	See Chart 5 (Tech Info Section)	500	152.4	113.0	51.4	24.0Ω/M' 78.7Ω/km	1.9Ω/M' 6.2Ω/km	.670 17.02	100	66%	15.5	50.9	27.5	90.2		

†24 AWG stranded TC drain wire.


DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

# Overall Foil/Braid Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-422 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil® (100% Coverage) + TC Braid Shield (65% Coverage) • Drain Wire†</b>																		
<b>Datalene® Insulation • Chrome PVC Jacket</b>																		
UL AWM Style 2919 (30V 80°C)	<b>8102</b>	NEC:	2	See	100	30.5	4.1	1.9	24.0Ω/M'	4.6Ω/M'	.270	6.86	100	78%	12.5	41	22	72.2
		CM		Chart 5	500	152.4	17.0	7.7	78.7Ω/km	15.1Ω/km								
	<b>8103</b>	CEC:	3	(Tech Info	1000	304.8	38.0	17.3	24.0Ω/M'	3.8Ω/M'	.283	7.19	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	380.0	172.7										
Shorting Fold	<b>8104</b>	CEC:	4	(Tech Info	1000	304.8	46.0	20.9	24.0Ω/M'	4.1Ω/M'	.302	7.67	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	490.0	222.7										
	<b>8105</b>	CEC:	5	(Tech Info	1000	304.8	53.0	24.1	24.0Ω/M'	4.2Ω/M'	.316	8.03	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	58.0	26.4										
	<b>8106</b>	CEC:	6	(Tech Info	1000	304.8	63.0	28.6	24.0Ω/M'	3.5Ω/M'	.341	8.66	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	63.0	28.6										
	<b>8107</b>	CEC:	7	(Tech Info	1000	304.8	63.0	28.6	24.0Ω/M'	3.5Ω/M'	.341	8.66	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	63.0	28.6										
	<b>8108</b>	CEC:	8	(Tech Info	1000	304.8	72.0	32.8	24.0Ω/M'	2.7Ω/M'	.370	9.40	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	72.0	32.8										
	<b>8110</b>	CEC:	10	(Tech Info	1000	304.8	90.0	40.9	24.0Ω/M'	2.4Ω/M'	.427	10.85	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	90.0	40.9										
	<b>8112</b>	CEC:	12.5 (12 pairs + 1 single)	(Tech Info	1000	304.8	101.0	45.9	24.0Ω/M'	2.4Ω/M'	.440	11.18	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	101.0	45.9										
	<b>8115</b>	CEC:	15	(Tech Info	1000	304.8	116.0	52.7	24.0Ω/M'	2.6Ω/M'	.495	12.57	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	116.0	52.7										
	<b>8118</b>	CEC:	18	(Tech Info	1000	304.8	144.0	65.5	24.0Ω/M'	2.1Ω/M'	.537	13.64	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	144.0	65.5										
	<b>8125</b>	CEC:	25	(Tech Info	1000	304.8	191.0	86.8	24.0Ω/M'	2.0Ω/M'	.632	16.05	100	78%	12.5	41	22	72.2
		CM		Section)	10000	3048.0	191.0	86.8										

†24 AWG stranded TC drain wire.

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.





For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr

# Overall Foil/Braid Shield

Low-Capacitance Computer Cables for EIA RS-232 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance				
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m	
<b>22 AWG Stranded (7x30) Tinned Copper Conductors • Twisted Pairs • Overall Beldfoil® (100% Coverage) + TC Braid Shield (65% Coverage)</b>																			
<b>Semi-rigid PVC Insulation • Chrome PVC Jacket</b>																			
 <p>UL AWM Style 2464 (300V 80°C)</p> <p>Z-Fold®</p>	<b>8302</b>	NEC:	2	See	100	30.5	4.5	2.0	15.0Ω/M'	5.7Ω/M'	.260	6.60	70	60%	40	131	72	236	
		CMG		Chart 3	500	152.4	19.0	8.6	49.2Ω/km	18.7Ω/km									
		CEC:		(Tech Info Section)	1000	304.8	41.0	18.6											
			CMG FT4																
		<b>8303</b>	NEC:	3	See	100	30.5	5.2	2.4	15.0Ω/M'	6.2Ω/M'	.270	6.86	70	60%	35	115	63	207
	CMG		Chart 3		500	152.4	25.5	11.6	49.2Ω/km	20.3Ω/km									
	CEC:		(Tech Info Section)		1000	304.8	48.0	21.8											
			CMG FT4																
		<b>8304</b>	NEC:	4	See	100	30.5	6.7	3.0	15.0Ω/M'	4.9Ω/M'	.320	8.13	70	60%	35	115	63	207
	CMG		Chart 3		500	152.4	32.5	14.7	49.2Ω/km	16.1Ω/km									
CEC:	(Tech Info Section)		1000		304.8	65.0	29.5												
		CMG FT4																	
	<b>8305</b>	NEC:	5	See	100	30.5	7.2	3.3	15.0Ω/M'	4.8Ω/M'	.322	8.18	70	60%	35	115	63	207	
CMG		Chart 3		500	152.4	35.0	15.9	49.2Ω/km	15.7Ω/km										
CEC:		(Tech Info Section)		1000	304.8	67.0	30.4												
		CMG FT4																	
	<b>8306</b>	NEC:	6	See	100	30.5	8.0	3.6	15.0Ω/M'	5.0Ω/M'	.348	8.84	70	60%	35	115	63	207	
CMG		Chart 3		500	152.4	39.5	18.0	49.2Ω/km	16.4Ω/km										
CEC:		(Tech Info Section)		1000	304.8	79.0	35.8												
		CMG FT4																	
	<b>8307</b>	NEC:	7	See	100	30.5	8.6	3.9	15.0Ω/M'	5.0Ω/M'	.348	8.84	70	60%	35	115	63	207	
CMG		Chart 3		500	152.4	42.0	19.0	49.2Ω/km	16.4Ω/km										
CEC:		(Tech Info Section)		1000	304.8	85.0	38.6												
		CMG FT4																	
	<b>8308</b>	NEC:	8	See	100	30.5	10.4	4.7	15.0Ω/M'	4.4Ω/M'	.384	9.75	70	60%	35	115	63	207	
CMG		Chart 3		500	152.4	50.0	22.7	49.2Ω/km	14.4Ω/km										
CEC:		(Tech Info Section)		1000	304.8	101.0	46.0												
		CMG FT4																	
 <p>UL AWM Style 2464 (300V 80°C)</p>	<b>8310</b>	NEC:	10	See	100	30.5	11.1	5.0	15.0Ω/M'	4.1Ω/M'	.440	11.18	70	60%	35	115	63	207	
		CMG		Chart 3	500	152.4	60.5	27.4	49.2Ω/km	13.4Ω/km									
		CEC:		(Tech Info Section)	1000	304.8	121.0	54.9											
			CMG FT4																
		<b>8312</b>	NEC:	12	See	100	30.5	12.9	5.9	15.0Ω/M'	4.2Ω/M'	.455	11.56	70	60%	35	115	63	207
	CMG		Chart 3		500	152.4	72.0	32.8	49.2Ω/km	13.8Ω/km									
	CEC:		(Tech Info Section)		1000	304.8	140.0	63.8											
			CMG FT4																
		<b>8315</b>	NEC:	15	See	100	30.5	15.7	7.1	15.0Ω/M'	3.8Ω/M'	.502	12.75	70	60%	35	115	63	207
	CMG		Chart 3		500	152.4	85.5	39.0	49.2Ω/km	12.5Ω/km									
CEC:	(Tech Info Section)		1000		304.8	167.0	76.1												
		CMG FT4																	
	<b>8318</b>	NEC:	18	See	100	30.5	17.7	8.0	15.0Ω/M'	3.0Ω/M'	.535	13.59	70	60%	35	115	63	207	
CMG		Chart 3		500	152.4	97.5	44.2	49.2Ω/km	9.8Ω/km										
CEC:		(Tech Info Section)		1000	304.8	196.0	89.1												
		CMG FT4																	
	<b>8325</b>	NEC:	25	See	100	30.5	23.1	10.5	15.0Ω/M'	2.9Ω/M'	.620	15.75	70	60%	35	115	63	207	
CMG		Chart 3		500	152.4	126.0	57.4	49.2Ω/km	9.5Ω/km										
CEC:		(Tech Info Section)		1000	304.8	246.0	112.1												
		CMG FT4																	

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

## Overall Foil/Braid Shield

Computer P.O.S. Cables

Plenum-Rated and Non-Plenum

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**22 AWG Solid TC Conductors • Twisted Pairs • Overall Beldfoil® (100% Coverage) + TC Braid Shield (90% Coverage) • TC Drain Wire**

**Polyethylene Insulation • Black PVC Jacket**

UL AWM Style 2582 (150V 60°C)	<b>1268A</b>	NEC: CM CEC: CM	2	Red & Blue, Black & Yellow	1000	304.8	48.0	21.8	16.5Ω/M' 54.1Ω/km	3.7Ω/M' 12.1Ω/km	.270	6.86	100	66%	15.5	50.9	27.5	90.2
----------------------------------	--------------	--------------------------	---	-------------------------------------	------	-------	------	------	----------------------	---------------------	------	------	-----	-----	------	------	------	------



For Plenum version of 1268A, see 1269A.

**Plenum • Solid FEP Insulation • Black FEP Jacket**

300V RMS, Non-conduit	<b>1269A</b>	NEC: MPP, CMP CEC: MPP, CMP FT6	2	Red & Blue, Black & Yellow	1000†	304.8	48.0	21.8	16.5Ω/M' 54.1Ω/km	2.1Ω/M' 6.9Ω/km	.240	6.10	100	69.5%	15.5	50.9	27.0	88.6
-----------------------	--------------	---	---	-------------------------------------	-------	-------	------	------	----------------------	--------------------	------	------	-----	-------	------	------	------	------



**22 AWG Solid TC Conductors • Twisted Pairs • Overall Beldfoil (100% Coverage) + TC Braid Shield (58% Coverage) • TC Drain Wire**

**Polyethylene Insulation • Black PVC Jacket**

UL AWM Style 2582 (150V 60°C)	<b>9855</b>	NEC: CM CEC: CM	2	Red & Blue, Black & Yellow	U-500 500 1000 10000††	U-152.4 152.4 304.8 3048.0	20.0 18.5 40.0 410.0	9.1 8.4 18.2 186.4	16.5Ω/M' 54.1Ω/km	4.2Ω/M' 13.8Ω/km	.270	6.86	100	66%	15.5	50.9	27.5	90.2
----------------------------------	-------------	--------------------------	---	-------------------------------------	---------------------------------	-------------------------------------	-------------------------------	-----------------------------	----------------------	---------------------	------	------	-----	-----	------	------	------	------



For Plenum version of 9855, see 89855.

**22 AWG Solid TC Conductors • Twisted Pairs • Overall Beldfoil (100% Coverage) + TC Braid Shield (55% Coverage) + Polyester Tape • Drain Wire**

**Plenum • Solid FEP Insulation • Black FEP Jacket**

300V RMS, Non-conduit	<b>89855</b>	NEC: MPP, CMP CEC: MPP, CMP FT6	2	1 Pair: Red & Blue	500† 1000†	152.4 304.8	22.5 42.0	10.2 19.1	16.5Ω/M' 54.1Ω/km	4.9Ω/M' 16.1Ω/km	.272	6.91	100	69.5%	15.5	50.9	27.0	88.6
-----------------------	--------------	--	---	--------------------------	---------------	----------------	--------------	--------------	----------------------	---------------------	------	------	-----	-------	------	------	------	------



**22 AWG Solid BC Conductors • Twisted Pairs • Overall Beldfoil (100% Coverage) + TC Braid Shield (58% Coverage) • TC Drain Wire**

**Polyethylene Insulation • Black PVC Jacket**

UL AWM Style 2919 (30V 80°C)	<b>9696</b>	NEC: CM CEC: CM	2	1 Pair: Blue & White w/Blue Stripe 1 Pair: Orange & White w/Orange Stripe	500 1000	152.4 304.8	23.5 44.0	10.7 20.0	14.2Ω/M' 46.6Ω/km	4.2Ω/M' 13.8Ω/km	.290	7.37	100	66%	16.0	52.5	27.5	90.2
---------------------------------	-------------	--------------------------	---	--	-------------	----------------	--------------	--------------	----------------------	---------------------	------	------	-----	-----	------	------	------	------



For Plenum version of 9696, see 89696.

**22 AWG Solid BC Conductors • Twisted Pairs • Overall Beldfoil (100% Coverage) + TC Braid Shield (55% Coverage) • TC Drain Wire**

**Plenum • Solid FEP Insulation • Black FEP Jacket**

300V RMS, Non-conduit	<b>89696</b>	NEC: MPP, CMP CEC: MPP, CMP FT6	2	1 Pair: Blue & White w/Blue Stripe 1 Pair: Orange & White w/Orange Stripe	500† 1000†	152.4 304.8	25.0 46.0	11.4 20.9	16.5Ω/M' 54.1Ω/km	4.2Ω/M' 13.8Ω/km	.262	6.65	100	69.5%	15.5	50.9	27.0	88.6
-----------------------	--------------	--	---	--	---------------	----------------	--------------	--------------	----------------------	---------------------	------	------	-----	-------	------	------	------	------



BC = Bare Copper • DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

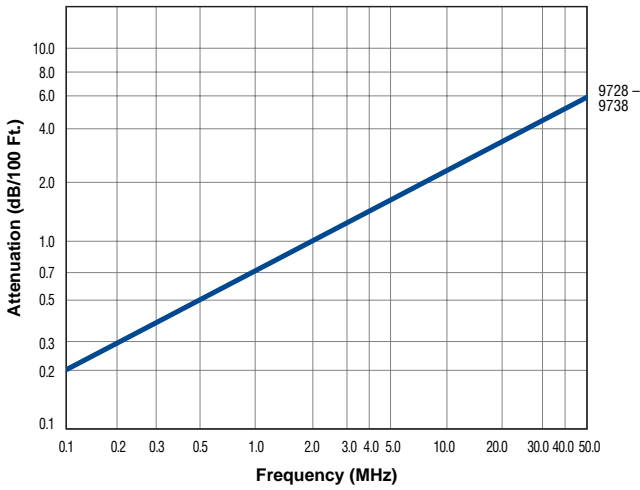
† Spools are one piece, but length may vary ±10% from length shown.

†† Final put-up length may vary -10% to +20% from length shown. May contain 2 pieces. Minimum length of any one piece is 1500 ft.

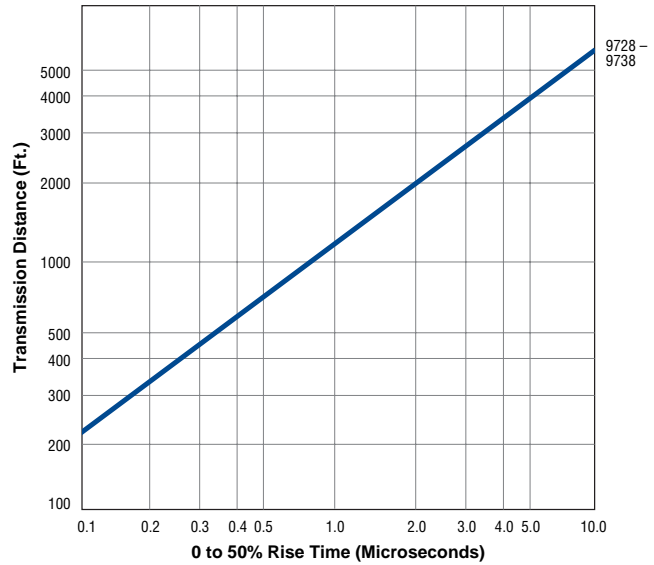
# Individually Shielded

## Cable Characteristics

**Attenuation**

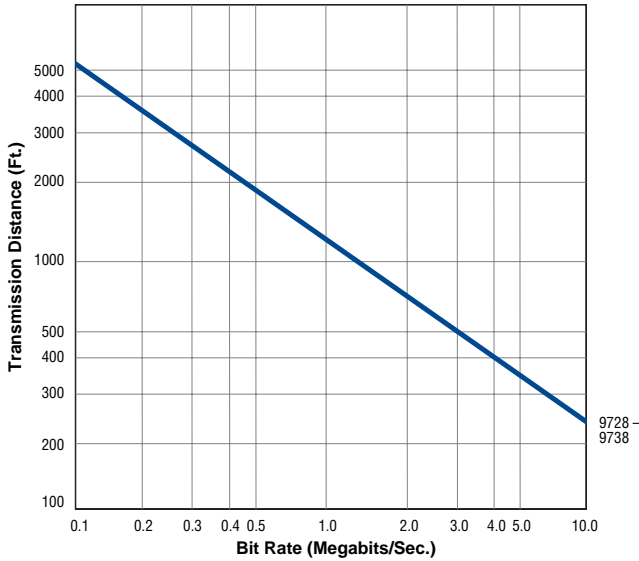


**Rise Time**



Cables are terminated in their characteristic impedance. Signal source electrical characteristics: 50 ohms and 10% to 90% rise time less than 5 nanoseconds.


**Bit Rate**



Charts assume 5% peak-to-peak time jitter as determined by eye pattern measurements of pseudorandom NRZ code.

## Individually Shielded

Low-Capacitance 100 Ohm Computer Cables for EIA RS-422, and Digital Audio Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance					
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m		
<b>24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Individually Shielded w/Beldfoil® (100% Coverage) • 24 AWG Stranded TC Drain Wire</b>																				
<b>Datalene® Insulation • Chrome PVC Jacket</b>																				
 <p>Z-Fold®</p>	<b>9729</b>	NEC:	2	See Chart 3	100	30.5	4.3	2.0	24.0Ω/M'	15.0Ω/M'	.266	6.76	100	76%	12.5	41.0	23.2	76.1		
		CM			500	152.4	20.5	9.3	78.7Ω/km	49.2Ω/km	For Plenum version of 9729, see 89729 or 82729.									
		CEC:			(Tech Info	1000	304.8	39.0	17.7											
		CM			Section)	10000†	3048.0	390.0	177.8											
	<b>9730</b>	NEC:	3	See Chart 3	100	30.5	5.1	2.3	24.0Ω/M'	15.0Ω/M'	.334	8.48	100	76%	12.5	41.0	23.2	76.1		
		CM			500	152.4	24.5	11.1	78.7Ω/km	49.2Ω/km	For Plenum version of 9730, see 89730.									
		CEC:			(Tech Info	1000	304.8	46.0	20.9											
		CM			Section)	10000†	3048.0	520.0	236.4											
	<b>9728</b>	NEC:	4	See Chart 3	100	30.5	6.0	2.7	24.0Ω/M'	15.0Ω/M'	.363	9.22	100	76%	12.5	41.0	23.2	76.1		
		CM			500	152.4	29.0	13.2	78.7Ω/km	49.2Ω/km	For Plenum version of 9728, see 89728.									
CEC:		(Tech Info			1000	304.8	51.0	23.1												
CM		Section)																		
<b>9731</b>	NEC:	6	See Chart 3	100	30.5	7.4	3.4	24.0Ω/M'	15.0Ω/M'	.421	10.69	100	76%	12.5	41.0	23.2	76.1			
	CM			500	152.4	42.0	19.1	78.7Ω/km	49.2Ω/km	For Plenum version of 9731, see 89731.										
	CEC:			(Tech Info	1000	304.8	83.0	37.7												
	CM			Section)																
<b>9732</b>	NEC:	9	See Chart 3	100	30.5	9.9	4.5	24.0Ω/M'	15.0Ω/M'	.488	12.40	100	76%	12.5	41.0	23.2	76.1			
	CM			500	152.4	57.0	26.0	78.7Ω/km	49.2Ω/km	For Plenum version of 9732, see 89732.										
	CEC:			(Tech Info	1000	304.8	106.0	48.1												
	CM			Section)																
<b>9733</b>	NEC:	11	See Chart 3	500	152.4	75.0	34.1	24.0Ω/M'	15.0Ω/M'	.575	14.61	100	76%	12.5	41.0	23.2	76.1			
	CM			1000	304.8	154.0	70.0	78.7Ω/km	49.2Ω/km											
	CEC:			(Tech Info																
	CM			Section)																
<b>9734</b>	NEC:	12	See Chart 3	500	152.4	79.5	36.1	24.0Ω/M'	15.0Ω/M'	.575	14.61	100	76%	12.5	41.0	23.2	76.1			
	CM			1000	304.8	154.0	70.0	78.7Ω/km	49.2Ω/km											
	CEC:			(Tech Info																
	CM			Section)																
<b>9735</b>	NEC:	15	See Chart 3	500	152.4	95.0	43.2	24.0Ω/M'	15.0Ω/M'	.639	16.23	100	76%	12.5	41.0	23.2	76.1			
	CM			1000	304.8	185.0	84.1	78.7Ω/km	49.2Ω/km											
	CEC:			(Tech Info																
	CM			Section)																
<b>9736</b>	NEC:	17	See Chart 3	500	152.4	103.5	47.0	24.0Ω/M'	15.0Ω/M'	.671	17.04	100	76%	12.5	41.0	23.2	76.1			
	CM			1000	304.8	210.0	95.5	78.7Ω/km	49.2Ω/km											
	CEC:			(Tech Info																
	CM			Section)																
<b>9737</b>	NEC:	19	See Chart 3	1000	304.8	231.0	105.0	24.0Ω/M'	15.0Ω/M'	.671	17.04	100	76%	12.5	41.0	23.2	76.1			
	CM							78.7Ω/km	49.2Ω/km											
	CEC:			(Tech Info																
	CM			Section)																
<b>9738</b>	NEC:	27	See Chart 3	1000	304.8	334.0	151.8	24.0Ω/M'	15.0Ω/M'	.797	20.24	100	76%	12.5	41.0	23.2	76.1			
	CM							78.7Ω/km	49.2Ω/km											
	CEC:			(Tech Info																
	CM			Section)																

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

† Final put-up length may vary -10% to +20% from length shown. May contain 2 pieces. Minimum length of any one piece is 1500 ft.

See Attenuation, Rise Time and Bit Rate Data for this series on page 5.34.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.




## Individually Shielded

Low-Capacitance Computer Cables for EIA RS-232, EIA RS-422, and Digital Audio Applications  
Plenum-Rated


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**24 AWG Stranded (7x32) TC Conductors • Twisted Pairs • Individually Shielded w/Beldfoil® (100% Coverage) • 24 AWG Stranded TC Drain Wire**

**Plenum • Foam FEP Insulation • Gray Fluorocopolymer Jacket**

	300V RMS	<b>89729</b>	NEC: CMP CEC: CMP FT6	2	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	17.0 31.0	7.7 14.1	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.261 6.63	100	76%	13.5	44	22.5	73.8
		<b>89730</b>	NEC: CMP CEC: CMP FT6	3	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	21.5 40.0	9.8 18.2	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.278 7.06	100	76%	13.5	44	22.5	73.8
		<b>89728</b>	NEC: CMP CEC: CMP FT6	4	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	26.5 50.0	12.0 22.7	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.307 7.80	100	76%	13.5	44	22.5	73.8
		<b>89731</b>	NEC: CMP CEC: CMP FT6	6	See Chart 5 (Tech Info Section)	500 1000†	152.4 304.8	35.0 71.0	15.9 32.3	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.361 9.17	100	76%	13.5	44	22.5	73.8
		<b>89732</b>	NEC: CMP CEC: CMP FT6	9	See Chart 5 (Tech Info Section)	1000	304.8	108.0	49.0	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.429 10.90	100	76%	13.5	44	22.5	73.8

**Plenum • Foam FEP Insulation • Natural Flamarrest® Jacket**


	300V RMS	<b>82729</b>	NEC: CMP CEC: CMP FT6	2	See Chart 5 (Tech Info Section)	U-1000 1000	U-304.8 304.8	26.0 28.0	11.8 12.7	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.255 6.48	100	76%	13.5	44	22.5	73.8
--	----------	--------------	--------------------------------	---	--	----------------	------------------	--------------	--------------	----------------------	----------------------	--------------	-----	-----	------	----	------	------

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.  
\*\*Capacitance between one conductor and other conductors connected to shield.  
† Spools are one piece, but length may vary ±10% from length shown.

# Individually Shielded Pairs with Overall Foil/Braid Shield

Low-Capacitance Computer Cables for EIA RS-232, EIA RS-422, and Digital Audio Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>24 AWG Stranded (7x32) TC Conductors • Twisted Pairs Individually Beldfoil® Shielded + Overall Beldfoil (100% Coverage) + TC Braid Shield (65%) • Drain Wire<sup>▲</sup></b>																		
<b>Datalene® Insulation • Chrome PVC Jacket</b>																		
UL AWM Style 2493 (60°C) VW-1  	<b>8162</b>	NEC: CM CEC: CM	2	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	6.2 30.0 57.0	2.8 13.6 25.9	24.0Ω/M' 78.7Ω/km	Individual: 18.0Ω/M' 59.1Ω/km Overall: 4.3Ω/M' 14.1Ω/km	.343 8.71	100	78%	12.5	41	22	72.2	
	<b>8163</b>	NEC: CM CEC: CM	3	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	7.0 34.0 66.0	3.2 15.5 30.0	24.0Ω/M' 78.7Ω/km	Individual: 18.0Ω/M' 59.1Ω/km Overall: 4.4Ω/M' 14.4Ω/km	.359 9.12	100	78%	12.5	41	22	72.2	
	<b>8164</b>	NEC: CM CEC: CM	4	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	8.2 39.5 79.0	3.7 18.0 35.9	24.0Ω/M' 78.7Ω/km	Individual: 18.0Ω/M' 59.1Ω/km Overall: 3.2Ω/M' 10.5Ω/km	.388 9.86	100	78%	12.5	41	22	72.2	
	<b>8165</b>	NEC: CM CEC: CM	5	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	9.0 45.0 89.0	4.1 20.5 40.5	24.0Ω/M' 78.7Ω/km	Individual: 18.0Ω/M' 59.1Ω/km Overall: 3.4Ω/M' 11.2Ω/km	.413 10.49	100	78%	12.5	41	22	72.2	
	<b>8166</b>	NEC: CM CEC: CM	6	See Chart 3 (Tech Info Section)	100 500 1000	30.5 152.4 304.8	9.0 50.0 99.0	4.1 22.7 45.0	24.0Ω/M' 78.7Ω/km	Individual: 18.0Ω/M' 59.1Ω/km Overall: 2.8Ω/M' 9.2Ω/km	.446 11.33	100	78%	12.5	41	22	72.2	
	<b>8167</b>	NEC: CM CEC: CM	7	See Chart 3 (Tech Info Section)	500 1000	152.4 304.8	52.5 103.0	23.9 46.7	24.0Ω/M' 78.7Ω/km	Individual: 18.0Ω/M' 59.1Ω/km Overall: 2.8Ω/M' 9.2Ω/km	.446 11.33	100	78%	12.5	41	22	72.2	

<sup>▲</sup>24 AWG stranded TC drain wire

DCR = DC Resistance • TC = Tinned Copper


\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

Datalene insulation features include low dielectric constant and a dissipation factor for high-speed, low-distortion data handling. Physical properties include good crush resistance and light weight.

## Individually Shielded Pairs with Overall Foil/Braid Shield

Low-Capacitance Computer Cables for EIA RS-232, EIA RS-422, and Digital Audio Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>24 AWG</b> Stranded (7x32) TC Conductors • Twisted Pairs Individually Beldfoil® Shielded + Overall Beldfoil (100% Coverage) + TC Braid Shield (65%) • Drain Wire <sup>▲</sup>																		
<b>Datalene® Insulation • Chrome PVC Jacket</b>																		
UL AWM Style 2493 (60°C) VW-1   Z-Fold®	<b>8168</b>	NEC:	8	See	100	30.5	10.8	4.9	24.0Ω/M'	Individual:	.479	12.17	100	78%	12.5	41	22	72.2
		CM		Chart 3	500	152.4	61.5	28.0	78.7Ω/km	18.0Ω/M'								
		CEC:		(Tech Info	1000	304.8	115.0	52.3	59.1Ω/km	Overall:								
		CM		Section)					3.0Ω/M'	9.8Ω/km								
	<b>8170</b>	NEC:	10	See	100	30.5	18.0	8.2	24.0Ω/M'	Individual:	.584	14.83	100	78%	12.5	41	22	72.2
CM		Chart 3		500	152.4	83.0	37.7	78.7Ω/km	18.0Ω/M'									
CEC:		(Tech Info		1000	304.8	164.0	74.5	59.1Ω/km	Overall:									
CM		Section)						2.7Ω/M'	8.9Ω/km									
	<b>8175</b>	NEC:	15	See	100	30.5	22.6	10.3	24.0Ω/M'	Individual:	.665	16.89	100	78%	12.5	41	22	72.2
CM		Chart 3		500	152.4	107.5	48.9	78.7Ω/km	18.0Ω/M'									
CEC:		(Tech Info		1000	304.8	210.0	95.5	59.1Ω/km	Overall:									
CM		Section)						2.5Ω/M'	8.2Ω/km									
	<b>8178</b>	NEC:	18	See	100	30.5	24.6	11.2	24.0Ω/M'	Individual:	.686	17.42	100	78%	12.5	41	22	72.2
CM		Chart 3		500	152.4	117.0	53.2	78.7Ω/km	18.0Ω/M'									
CEC:		(Tech Info		1000	304.8	238.0	108.2	59.1Ω/km	Overall:									
CM		Section)						2.6Ω/M'	8.5Ω/km									
	<b>8185</b>	NEC:	25	See	100	30.5	32.3	14.7	24.0Ω/M'	Individual:	.822	20.88	100	78%	12.5	41	22	72.2
CM		Chart 3		500	152.4	160.5	73.0	78.7Ω/km	18.0Ω/M'									
CEC:		(Tech Info		1000	304.8	356.0	161.8	59.1Ω/km	Overall:									
CM		Section)						2.4Ω/M'	7.9Ω/km									

<sup>▲</sup>24 AWG stranded TC drain wire

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

# Plenum-Rated


## Overall Beldfoil® Shield

### Computer Cables for EIA RS-232 Applications


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Insulation Thickness		Jacket Thickness		Nominal OD		Nominal Capacitance			
					Ft.	m	Lbs.	kg	Inch	mm	Inch	mm	Inch	mm	* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**24 AWG Stranded (7x32) Tinned Copper Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire**

**Plenum • FEP Insulation • Red FEP Jacket**

	<b>300V RMS</b>	<b>88641</b>	NEC:	1	Black & Red	100	30.5	2.4	1.1	.006	.15	.014	.36	.106	2.69	31	102	59	194			
			CMP:			500†	152.4	6.0	2.7													
			CEC:			1000†	304.8	9.0	4.1													
			CMP FT6																			
		<b>89503</b>	NEC:	3	Black & White, Black & Red,	100	30.5	4.0	1.8	.006	.15	.014	.36	.175	4.45	21	69	40	131			
			CMP:			500†	152.4	10.5	4.8													
			CEC:			1000†	304.8	21.0	9.5													
			CMP FT6																			
		<b>89504</b>	NEC:	4	Black & White, Black & Red, Black & Green,	500†	152.4	13.0	5.9	.006	.15	.014	.36	.192	4.88	21	69	40	131			
			CMP:			1000†	304.8	29.0	13.2													
			CEC:																			
			CMP FT6																			
		<b>89505</b>	NEC:	5	Black & White, Black & Red, Black & Green, Black & Blue,	100	30.5	4.9	2.2	.006	.15	.014	.36	.197	5.00	21	69	40	131			
			CMP:			1000†	304.8	33.0	15.0													
			CEC:																			
			CMP FT6																			

**Plenum • FEP Insulation • Natural Flamarrest® Jacket**

	<b>300V RMS</b>	<b>82641</b>	NEC:	1	Black & Red	U-1000	U-304.8	9.0	4.1	.006	.15	.014	.36	.106	2.69	31	102	59	194			
			CMP:			1000	304.8	8.0	3.6													
			CEC:																			
			CMP FT6																			
		<b>82502</b>	NEC:	2	Black & White, Black & Red	U-500	U-152.4	8.0	3.6	.006	.15	.014	.36	.162	4.11	25	82	45	148			
			CMP:			U-1000	U-304.8	16.0	7.3													
			CEC:			1000	304.8	14.0	6.4													
			CMP FT6																			
		<b>82503</b>	NEC:	3	Black & White, Black & Red, Black & Green	U-1000	U-304.8	19.0	8.6	.006	.15	.014	.36	.169	4.29	25	82	45	148			
			CMP:			1000	304.8	18.0	8.2													
			CEC:																			
			CMP FT6																			
		<b>82504</b>	NEC:	4	Black & White, Black & Red, Black & Green, Black & Blue	U-1000	U-304.8	24.0	10.9	.006	.15	.014	.36	.193	4.90	25	82	45	148			
			CMP:			1000	304.8	26.0	11.8													
			CEC:																			
			CMP FT6																			
		<b>82505</b>	NEC:	5	See	U-1000	U-304.8	29.0	13.2	.006	.15	.015	.38	.196	4.98	25	82	45	148			
			CMP:		Chart 3	1000	304.8	31.0	14.0													
			CEC:		(Tech Info Section)																	
			CMP FT6																			
		<b>82506</b>	NEC:	6	See	U-500	U-152.4	17.5	8.0	.006	.15	.015	.38	.209	5.31	25	82	45	148			
			CMP:		Chart 3	U-1000	U-304.8	34.0	15.5													
			CEC:		(Tech Info Section)	1000	304.8	35.0	15.9													
			CMP FT6																			
		<b>82509</b>	NEC:	9	See	1000	304.8	49.0	22.3	.006	.15	.015	.38	.246	6.25	23	75	42	138			
			CMP:		Chart 3																	
			CEC:		(Tech Info Section)																	
			CMP FT6																			
		<b>82512</b>	NEC:	12.5	See	1000	304.8	60.0	27.3	.006	.15	.015	.38	.278	7.06	23	75	42	138			
			CMP:		(12 pairs + 1 single)	Chart 3																
			CEC:		(Tech Info Section)																	
			CMP FT6																			

TC = Tinned Copper

\*Capacitance between conductors.


\*\*Capacitance between one conductor and other conductors connected to shield.

† Spools and/or UnReel® cartons are one piece, but length may vary ±10% for spools and ±5% for UnReel from length shown.

# Plenum-Rated

Overall Beldfoil® Shield

Low-Capacitance Computer Cables for EIA RS-232 and EIA RS-422 Applications

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m
<b>24 AWG Stranded (7x32) Tinned Copper Conductors • Twisted Pairs • Overall Beldfoil Shield (100% Coverage) • 24 AWG Stranded TC Drain Wire</b>																		
<b>Plenum • Foam FEP Insulation • Gray Fluorocopolymer Jacket</b>																		
	300V RMS	<b>88102</b>	NEC: CMP CEC: CMP FT6	2	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	10.0 20.0	4.5 9.1	24.0Ω/M' 78.7Ω/km	15.5Ω/M' 50.9Ω/km	.203 5.16	100	78%	12.95	42.5	23.3	76.4
		<b>88103</b>	NEC: CMP CEC: CMP FT6	3	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	13.5 31.0	6.1 14.1	24.0Ω/M' 78.7Ω/km	15.5Ω/M' 50.9Ω/km	.239 6.07	100	78%	12.95	42.5	23.3	76.4
		<b>88104</b>	NEC: CMP CEC: CMP FT6	4	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	17.0 38.0	7.7 17.3	24.0Ω/M' 78.7Ω/km	14.0Ω/M' 45.9Ω/km	.259 6.58	100	78%	12.95	42.5	23.3	76.4
		<b>88105</b>	NEC: CMP CEC: CMP FT6	5	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	23.5 44.0	10.7 20.0	24.0Ω/M' 78.7Ω/km	14.0Ω/M' 45.9Ω/km	.267 6.78	100	78%	12.95	42.5	23.3	76.4
		<b>88106</b>	NEC: CMP CEC: CMP FT6	6	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	26.5 50.0	12.0 22.7	24.0Ω/M' 78.7Ω/km	14.0Ω/M' 45.9Ω/km	.293 7.44	100	78%	12.95	42.5	23.3	76.4
		<b>88107</b>	NEC: CMP CEC: CMP FT6	7.5 (7 pairs + 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	31.0 59.0	14.1 26.8	24.0Ω/M' 78.7Ω/km	14.0Ω/M' 45.9Ω/km	.293 7.44	100	78%	12.95	42.5	23.3	76.4
		<b>88109</b>	NEC: CMP CEC: CMP FT6	9	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	36.5 74.0	16.6 33.6	24.0Ω/M' 78.7Ω/km	13.0Ω/M' 42.7Ω/km	.352 8.94	100	78%	12.95	42.5	23.3	76.4
		<b>88112</b>	NEC: CMP CEC: CMP FT6	12.5 (12 pairs + 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	48.0 97.0	21.8 44.1	24.0Ω/M' 78.7Ω/km	11.8Ω/M' 38.7Ω/km	.397 10.08	100	78%	12.95	42.5	23.3	76.4
		<b>88118</b>	NEC: CMP CEC: CMP FT6	18.5 (18 pairs + 1 single)	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	71.0 148.0	32.2 67.3	24.0Ω/M' 78.7Ω/km	11.0Ω/M' 36.1Ω/km	.482 12.24	100	78%	12.95	42.5	23.3	76.4
		<b>88125</b>	NEC: CMP CEC: CMP FT6	25	See Chart 5 (Tech Info Section)	500† 1000†	152.4 304.8	98.0 195.0	44.5 88.6	24.0Ω/M' 78.7Ω/km	9.6Ω/M' 31.5Ω/km	.581 14.76	100	78%	12.95	42.5	23.3	76.4

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.

† Spools are one piece, but length may vary ±10% from length shown.

# Plenum-Rated

Overall Foil/Braid Shield

Low-Capacitance Computer and Computer P.O.S. Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**Low Cap 24 AWG** Stranded (7x32) TC Conductors • Twisted Pairs • Overall Beldfoil® (100% Coverage) + TC Braid Shield (90% Cov.) • Drain Wire

**Plenum • Foam FEP Insulation • Natural Flamarrest® Jacket**

	<b>82841</b>	NEC:	1	See Chart 5 (Tech Info Section)	500	152.4	13.0	6.0	24.0Ω/M'	3.1Ω/M'	.204	5.18	120	76%	12	39.4	22	72.2
		CMP			1000	304.8	26.0	11.8	78.7Ω/km	10.2Ω/km								

	<b>82842</b>	NEC:	2	See Chart 5 (Tech Info Section)	500	152.4	19.0	8.6	24.0Ω/M'	2.4Ω/M'	.273	6.93	120	76%	12	39.4	22	72.2
		CMP			1000	304.8	42.0	19.1	78.7Ω/km	7.9Ω/km								

**Plenum • Foam FEP Insulation • Red FEP Jacket**

	<b>89841</b>	NEC:	1	See Chart 5 (Tech Info Section)	500	152.4	13.5	6.1	24.0Ω/M'	3.1Ω/M'	.202	5.13	120	76%	12	39.4	22	72.2
		CMP			1000	304.8	27.0	12.3	78.7Ω/km	10.2Ω/km								

	<b>89842</b> <small>new</small>	NEC:	2	See Chart 5 (Tech Info Section)	500	152.4	25.5	11.6	24.0Ω/M'	3.1Ω/M'	.305	7.75	120	76%	12	39.4	22	72.2
		CMP			1000	304.8	49.0	22.2	78.7Ω/km	10.2Ω/km								

**22 AWG** Solid TC Conductors • Twisted Pairs • Overall Beldfoil (100% Coverage) + TC Braid Shield (90% Coverage) • 22 AWG TC Drain Wire

**Plenum • Solid FEP Insulation • Black FEP Jacket**

	<b>1269A</b>	NEC:	2	Red & Blue, Black & Yellow	1000	304.8	48.0	21.8	16.5Ω/M'	2.1Ω/M'	.240	6.10	100	69.5%	15.5	50.9	27	88.6
		MPP, CMP							54.1Ω/km	6.9Ω/km								

**22 AWG** Solid TC Conductors • Twisted Pairs • Overall Beldfoil (100% Coverage) + TC Braid Shield (55% Cov.) + Polyester Tape • 22 AWG Drain Wire

**Plenum • Solid FEP Insulation • Black FEP Jacket**

	<b>89855</b>	NEC:	2	1 Pair: Red & Blue	500	152.4	22.5	10.2	16.5Ω/M'	4.9Ω/M'	.272	6.91	100	69.5%	15.5	50.9	27	88.6
		MPP, CMP			1000	304.8	42.0	19.1	54.1Ω/km	16.1Ω/km								

**22 AWG** Solid BC Conductors • Twisted Pairs • Overall Beldfoil (100% Coverage) + TC Braid Shield (55% Coverage) • 22 AWG Solid TC Drain Wire

**Plenum • Solid FEP Insulation • Black FEP Jacket**

	<b>89696</b>	NEC:	2	1 Pair: Blue & White with Blue Stripes	500	152.4	25.0	11.4	16.5Ω/M'	4.2Ω/M'	.262	6.65	100	69.5%	15.5	50.9	27	88.6
		MPP, CMP			1000	304.8	46.0	20.9	54.1Ω/km	13.8Ω/km								

BC = Bare Copper • DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.



For more information, contact Belden Technical Support: 1-800-BELDEN-1 • www.belden.com

Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr

## Plenum-Rated

Individually Shielded Pairs

Low-Capacitance Computer Cables for EIA RS-232, EIA RS-422, and Digital Audio Applications


Description	Part No.	UL NEC/ C(UL) CEC Type	No. of Pairs	Color Code	Standard Lengths		Standard Unit Weight		Nom. DCR		Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nom. Capacitance			
					Ft.	m	Lbs.	kg	Cond.	Shield	Inch	mm			* pF/ Ft.	* pF/ m	** pF/ Ft.	** pF/ m

**24 AWG** Stranded (7x32) TC Conductors • Twisted Pairs • Individually Shielded w/Beldfoil® (100% Coverage) • 24 AWG Stranded TC Drain Wire

### Plenum • Foam FEP Insulation • Gray Fluorocopolymer Jacket

	300V RMS	<b>89729</b>	NEC: CMP CEC: CMP FT6	2	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	17.0 31.0	7.7 14.1	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.261 6.63	100	76%	13.5	44	22.5	73.8
		<b>89730</b>	NEC: CMP CEC: CMP FT6	3	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	21.5 40.0	9.8 18.2	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.278 7.06	100	76%	13.5	44	22.5	73.8
		<b>89728</b>	NEC: CMP CEC: CMP FT6	4	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	26.5 50.0	12.0 22.7	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.307 7.80	100	76%	13.5	44	22.5	73.8
		<b>89705</b>	NEC: CMP CEC: CMP FT6	5	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	30.5 62.0	13.9 28.2	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.333 8.50	100	76%	13.5	44	22.5	73.8
		<b>89731</b>	NEC: CMP CEC: CMP FT6	6	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	35.0 71.0	15.9 32.3	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.361 9.17	100	76%	13.5	44	22.5	73.8
		<b>89757</b>	NEC: CMP CEC: CMP FT6	7	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	39.5 80.0	18.0 36.4	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.361 9.17	100	76%	13.5	44	22.5	73.8
		<b>89732</b>	NEC: CMP CEC: CMP FT6	9	See Chart 5 (Tech Info Section)	1000	304.8	108.0	49.2	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.433 10.90	100	76%	13.5	44	22.5	73.8
		<b>89734</b>	NEC: CMP CEC: CMP FT6	12	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	71.0 140.0	32.3 63.6	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.498 12.65	100	76%	13.5	44	22.5	73.8
		<b>89758</b>	NEC: CMP CEC: CMP FT6	18	See Chart 5 (Tech Info Section)	500 1000	152.4 304.8	100.5 204.0	45.7 92.7	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.616 15.65	100	76%	13.5	44	22.5	73.8

### Plenum • Foam FEP Insulation • Natural Flamarrest® Jacket

	300V RMS	<b>82729</b>	NEC: CMP CEC: CMP FT6	2	See Chart 5 (Tech Info Section)	U-1000 1000	U-304.8 304.8	26.0 28.0	11.8 12.7	23.3Ω/M' 76.4Ω/km	14.4Ω/M' 47.2Ω/km	.255 6.48	100	76%	13.5	44	22.5	73.8
---	----------	--------------	--------------------------------	---	--	----------------	------------------	--------------	--------------	----------------------	----------------------	--------------	-----	-----	------	----	------	------

DCR = DC Resistance • TC = Tinned Copper

\*Capacitance between conductors.

\*\*Capacitance between one conductor and other conductors connected to shield.