


Low Loss 50 Ohm Wireless RF Transmission Cable

Intermediate Type

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

Intermediate Type • 13 AWG Solid .072" Bare Copper Conductor • Duobond® II (100% Coverage) + Tinned Copper Braid Shield (95% Coverage)

Gas-injected Foam HDPE Insulation • Black Polyethylene Jacket


RF300 80°C	7809A	—	500	152.4	30.5	13.9	13 AWG (solid) .072" BC 2.1Ω/M' 6.9Ω/km	.190	4.83	Duobond II* + 95% TC Braid BC 2.4Ω/M' 7.8Ω/km	.300	7.62	50	86%	23.0	75.5	30	1.0	3.4
			1000	304.8	58.0	26.3											50	1.3	4.2
																	150	2.2	7.3
																	220	2.7	8.9
																	450	3.9	12.9
																	900	5.6	18.3
																	1500	7.3	24.0
																	1800	8.1	26.5
																	2000	8.6	28.2
																	2500	9.7	31.9
																	3000	10.8	35.4
																	4500	13.5	44.4
5800	15.8	51.8																	
6000	16.0	52.6																	

100% Sweep tested. 6 GHz. Max. VSWR 1.25:1.

Belden® The Wire in Wireless.

Mates with Land Mobile Radio type connectors.**
Suitable for Outdoor and Direct Burial applications.

Gas-injected Foam HDPE Insulation • Black PVC Jacket


RF300 80°C	7809R	NEC:	500	152.4	34.0	15.5	13 AWG (solid) .072" BC 2.1Ω/M' 6.9Ω/km	.190	4.83	Duobond II* + 95% TC Braid BC 2.4Ω/M' 7.8Ω/km	.300	7.62	50	86%	23.0	75.5	30	1.0	3.4
		CMR:	1000	304.8	65.0	29.5											50	1.3	4.2
																	150	2.2	7.3
																	220	2.7	8.9
																	450	3.9	12.9
																	900	5.6	18.3
																	1500	7.3	24.0
																	1800	8.1	26.5
																	2000	8.6	28.2
																	2500	9.7	31.9
																	3000	10.8	35.4
																	4500	13.5	44.4
5800	15.8	51.8																	
6000	16.0	52.6																	

100% Sweep tested. 6 GHz. Max. VSWR 1.25:1.

Belden® The Wire in Wireless.

Mates with Land Mobile Radio type connectors.**

Gas-injected Foam HDPE Insulation • Flooded Water-resistant Black Polyethylene Jacket

RF300 80°C	7809WB	—	500	152.4	30.5	13.9	13 AWG (solid) .072" BC 2.1Ω/M' 6.9Ω/km	.190	4.83	Duobond II* + 95% TC Braid BC 2.4Ω/M' 7.8Ω/km	.300	7.62	50	86%	23.0	75.5	30	1.0	3.4
			1000	304.8	58.0	26.3											50	1.3	4.2
																	150	2.2	7.3
																	220	2.7	8.9
																	450	3.9	12.9
																	900	5.6	18.3
																	1500	7.3	24.0
																	1800	8.1	26.5
																	2000	8.6	28.2
																	2500	9.7	31.9
																	3000	10.8	35.4
																	4500	13.5	44.4
5800	15.8	51.8																	
6000	16.0	52.6																	

100% Sweep tested. 6 GHz. Max. VSWR 1.25:1.

Belden® The Wire in Wireless.

Mates with Land Mobile Radio type connectors.**
Suitable for Outdoor and Direct Burial applications.

BC = Bare Copper • DCR = DC Resistance • HDPE = High-density Polyethylene • TC = Tinned Copper

*Duobond II = Bonded Duofoil® (100% coverage) + aluminum braid (67% coverage).

**Please consult Belden's website, www.belden.com, for complete listing.

Low Loss 50 Ohm Wireless RF Transmission Cable

RG-8 Type

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

RG-8 Type • 10 AWG Solid .108" Bare Copper-covered Aluminum Conductor • Duobond® II (100% Coverage) + Tinned Copper Braid Shield (95% Coverage)

Gas-injected Foam HDPE Insulation • Black Polyethylene Jacket

RF400 80°C	7810A	—	500	152.4	42.5	19.3	10 AWG (solid) .108" BCCA 1.34Ω/M' 4.4Ω/km	.285	7.24	Duobond II* + 95% TC Braid 2.0Ω/M' 9.2Ω/km	.403	10.23	50	86%	23.0	75.5	30	.7	2.1																							
			1000	304.8	86.0	39.0											50	.9	2.8	150	1.5	4.9	220	1.8	6.0	450	2.7	8.8	900	3.8	12.6	1500	5.1	16.6	1800	5.6	18.5	2000	6.0	19.6	2500	6.7



100% Sweep tested. 6 GHz. Max. VSWR 1.25:1.

Belden® The Wire in Wireless.

Mates with 9913 and Land Mobile Radio type connectors.**
Suitable for Outdoor and Direct Burial applications.

Gas-injected Foam HDPE Insulation • Black PVC Jacket

RF400 80°C	7810R*	NEC:	500	152.4	47.0	21.3	10 AWG (solid) .108" BCCA 1.34Ω/M' 4.4Ω/km	.285	7.24	Duobond II* + 95% TC Braid 2.0Ω/M' 9.2Ω/km	.403	10.23	50	86%	23.0	75.5	30	.7	2.1																								
		CMR:	1000	304.8	79.0	35.8											50	.9	2.8	150	1.5	4.9	220	1.8	6.0	450	2.7	8.8	900	3.8	12.6	1500	5.1	16.6	1800	5.6	18.5	2000	6.0	19.6	2500	6.7	22.0



CMG FT4

100% Sweep tested. 6 GHz. Max. VSWR 1.25:1.

Belden® The Wire in Wireless.

Mates with 9913 and Land Mobile Radio type connectors.**
Suitable for Outdoor applications.

Gas-injected Foam HDPE Insulation • Flooded Water-resistant Black Polyethylene Jacket

RF400 80°C	7810WB	—	500	152.4	39.5	17.9	10 AWG (solid) .108" BCCA 1.34Ω/M' 4.4Ω/km	.285	7.24	Duobond II* + 95% TC Braid 2.0Ω/M' 9.2Ω/km	.403	10.23	50	86%	23.0	75.5	30	.7	2.1																							
			1000	304.8	80.0	36.3											50	.9	2.8	150	1.5	4.9	220	1.8	6.0	450	2.7	8.8	900	3.8	12.6	1500	5.1	16.6	1800	5.6	18.5	2000	6.0	19.6	2500	6.7



100% Sweep tested. 6 GHz. Max. VSWR 1.25:1.

Belden® The Wire in Wireless.

Mates with 9913 and Land Mobile Radio type connectors.**
Suitable for Outdoor and Direct Burial applications.

BCCA = Bare Copper-covered Aluminum • DCR = DC Resistance • HDPE = High-density Polyethylene • TC = Tinned Copper

*Duobond II = Bonded Duofoil® (100% coverage) + aluminum braid (67% coverage).

**Please consult Belden's website, www.belden.com, for complete listing.

Low Loss 50 Ohm Wireless RF Transmission Cable

Series RF500

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

7 AWG Solid .142" Bare Copper-covered Aluminum Conductor • Duobond® II (100% Coverage) + Tinned Copper Braid Shield (90% Coverage)

Foam HDPE Insulation • Black Polyethylene Jacket

80°C	7976A <small>new</small>	—	500	152.4	56.0	25.4	7 AWG (solid)	.370	9.40	Duobond II* + 90% TC Braid	.500	12.70	50	84%	25.1	82.4	30	.6	1.8
			1000	304.8	108.0	49.0	.142" BCCA			1.6Ω/M'							50	.7	2.4
							.8Ω/M'			5.3Ω/km							150	1.2	3.9
							2.7Ω/km										220	1.5	4.9
																	450	2.2	7.2
																	900	3.2	10.5
																	1500	4.2	13.8
																	1800	4.7	15.4
																	2000	5.0	16.4
																	2500	5.7	18.7
																	3000	6.3	20.7
																	3500	6.9	22.6
																	4500	8.0	26.2
																	5800	9.3	30.5
																	6000	9.5	31.2

Suitable for Outdoor applications and Aerial applications when supported by a Messenger wire.

Foam HDPE Insulation • Black PVC Jacket

80°C	7976R <small>new</small>	NEC: CMR CEC: CMG FT4	500	152.4	67.5	30.6	7 AWG (solid)	.370	9.40	Duobond II* + 90% TC Braid	.500	12.70	50	84%	25.1	82.4	30	.6	1.8
			1000	304.8	131.0	59.5	.142" BCCA			1.6Ω/M'							50	.7	2.4
							.8Ω/M'			5.3Ω/km							150	1.2	3.9
							2.7Ω/km										220	1.5	4.9
																	450	2.2	7.2
																	900	3.2	10.5
																	1500	4.2	13.8
																	1800	4.7	15.4
																	2000	5.0	16.4
																	2500	5.7	18.7
																	3000	6.3	20.7
																	3500	6.9	22.6
																	4500	8.0	26.2
																	5800	9.3	30.5
																	6000	9.5	31.2

Suitable for Outdoor applications and Aerial applications when supported by a Messenger wire.

Foam HDPE Insulation • Flooded Water-resistant Black Polyethylene Jacket

80°C	7976WB <small>new</small>	—	500	152.4	56.5	25.7	7 AWG (solid)	.370	9.40	Duobond II* + 90% TC Braid	.500	12.70	50	84%	25.1	82.4	30	.6	1.8
			1000	304.8	109.0	49.9	.142" BCCA			1.6Ω/M'							50	.7	2.4
							.8Ω/M'			5.3Ω/km							150	1.2	3.9
							2.7Ω/km										220	1.5	4.9
																	450	2.2	7.2
																	900	3.2	10.5
																	1500	4.2	13.8
																	1800	4.7	15.4
																	2000	5.0	16.4
																	2500	5.7	18.7
																	3000	6.3	20.7
																	3500	6.9	22.6
																	4500	8.0	26.2
																	5800	9.3	30.5
																	6000	9.5	31.2

Suitable for Outdoor and Direct Burial applications and Aerial applications when supported by a Messenger wire.

BCCA = Bare Copper-covered Aluminum • DCR = DC Resistance • HDPE = High-density Polyethylene • TC = Tinned Copper

*Duobond II = Bonded Duofoil® (100% coverage) + aluminum braid (67% coverage).


Low Loss 50 Ohm Wireless RF Transmission Cable

Series RF600

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. of Prop. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

5.5 AWG Solid .176" Bare Copper-covered Aluminum Conductor • Duobond® II (100% Coverage) + Tinned Copper Braid Shield (85% Coverage)


Foam HDPE Insulation • Black Polyethylene Jacket

80°C	7977A <small>new</small>	—	500	152.4	73.5	33.4	5.5 AWG (solid) .176" BCCA .5Ω/M' 1.7Ω/km	.455	11.56	Duobond II* + 85% TC Braid 1.8Ω/M' 5.9Ω/km	.590	14.99	50	85%	24.6	80.7	30	.5	1.5
			1000	304.8	145.0	65.8											50	.6	2.0
																	150	1.0	3.2
																	220	1.2	3.9
																	450	1.7	5.6
																	900	2.5	8.3
																	1500	3.4	11.2
																	1800	3.8	12.4
																	2000	4.0	13.2
																	2500	4.6	15.0
																	3000	5.1	16.6
																	3500	5.6	18.2
4500	6.4	21.1																	
5800	7.6	24.8																	
6000	7.8	25.4																	

100% Sweep tested.
Belden® The Wire in Wireless.

Suitable for Outdoor applications and Aerial applications when supported by a Messenger wire.


Foam HDPE Insulation • Black PVC Jacket

80°C	7977R <small>new</small>	NEC: CMR CEC: CMG FT4	500	152.4	89.5	40.6	5.5 AWG (solid) .176" BCCA .5Ω/M' 1.7Ω/km	.455	11.56	Duobond II* + 85% TC Braid 1.8Ω/M' 5.9Ω/km	.590	14.99	50	84%	24.6	80.7	30	.5	1.5
			1000	304.8	173.0	78.5											50	.6	2.0
																	150	1.0	3.2
																	220	1.2	3.9
																	450	1.7	5.6
																	900	2.5	8.3
																	1500	3.4	11.2
																	1800	3.8	12.4
																	2000	4.0	13.2
																	2500	4.6	15.0
																	3000	5.1	16.6
																	3500	5.6	18.2
4500	6.4	21.1																	
5800	7.6	24.8																	
6000	7.8	25.4																	

100% Sweep tested.
Belden® The Wire in Wireless.

Suitable for Outdoor applications and Aerial applications when supported by a Messenger wire.

Foam HDPE Insulation • Flooded Water-resistant Black Polyethylene Jacket

80°C	7977WB <small>new</small>	—	500	152.4	74.0	33.6	5.5 AWG (solid) .176" BCCA .5Ω/M' 1.7Ω/km	.455	11.56	Duobond II* + 85% TC Braid 1.8Ω/M' 5.9Ω/km	.590	14.99	50	85%	24.6	80.7	30	.5	1.5
			1000	304.8	146.0	66.3											50	.6	2.0
																	150	1.0	3.2
																	220	1.2	3.9
																	450	1.7	5.6
																	900	2.5	8.3
																	1500	3.4	11.2
																	1800	3.8	12.4
																	2000	4.0	13.2
																	2500	4.6	15.0
																	3000	5.1	16.6
																	3500	5.6	18.2
4500	6.4	21.1																	
5800	7.6	24.8																	
6000	7.8	25.4																	

100% Sweep tested.
Belden® The Wire in Wireless.




Suitable for Outdoor and Direct Burial applications and Aerial applications when supported by a Messenger wire.

BCCA = Bare Copper-covered Aluminum • DCR = DC Resistance • HDPE = High-density Polyethylene • TC = Tinned Copper

*Duobond II = Bonded Duofoil® (100% coverage) + aluminum braid (67% coverage).

Low Loss 50 Ohm Wireless RF Transmission Coax

Electrical Characteristics

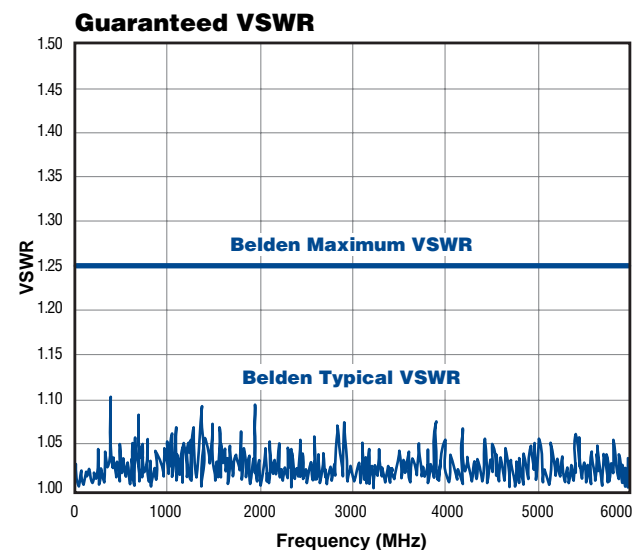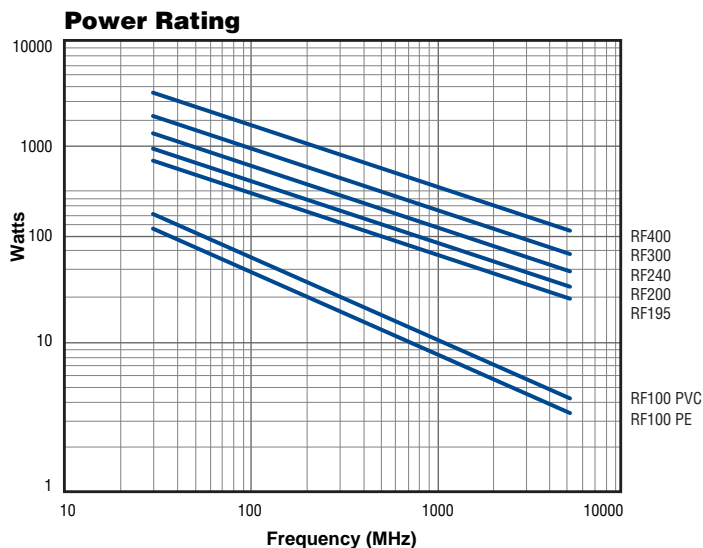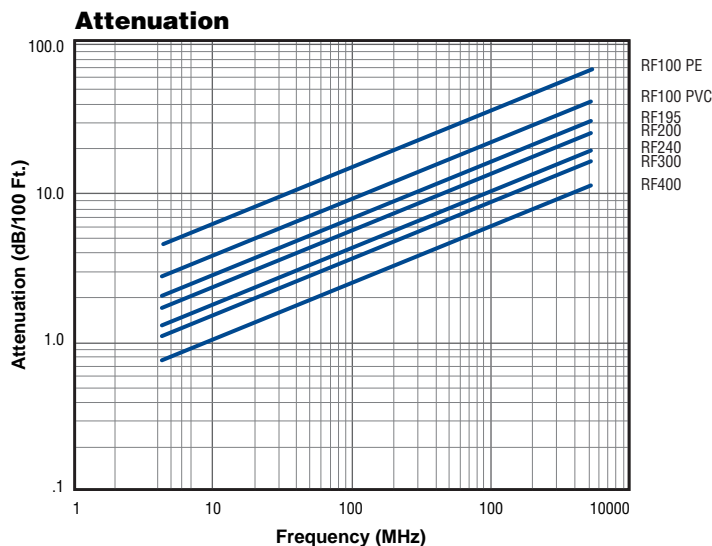

Voltage Standing Wave Ratio is a measurement of the reflected power in a cable or instrument. The higher the VSWR the poorer the transmission characteristics of the cable.

Phase Stability

Phase Attribute	Typical Range (0.45 GHz to 6.0 GHz)	
	ppm/°C	Degree/GHz/m
Temperature (-40°C to +85°C) ¹	±9	±0.6
Bending & Flexing (25 cycles) ²	NA	±1.1

1: Per IEC 60966-1 clause 8.8

2: Per IEC 60966-1 clause 8.6

RG Cable Replacement Guide

Part Number	Size	Replacing
7805	RF100A	RG-174/U
7805R	RF100LL	RG-174/U
7806A	RF195	RG-58/U
7807A	RF200	RG-58/U
7808A	RF240	RG-8X
7809A	RF300	RG-8X
7810A	RF400	RG-8U

50 Ohm Transmission and Computer Cable

RG-188A/U, RG-174/U and RG-58/U Type

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

RG-174/U Type • 26 AWG Stranded (7x34) .019" Bare Copper-covered Steel Conductor • Tinned Copper Braid Shield (90% Coverage)

Polyethylene Insulation • Black PVC Jacket

UL AWM Style 1354 (30V 75°C)	8216	—	100	30.5	1.1	.5	26 AWG (7x34)	.060	1.52	TC Braid	.110	2.79	50	66%	30.8	101.0	1	1.9	6.2
			500	152.4	5.0	2.3				90% Shield							10	3.3	10.8
			1000††	304.8	9.0	4.1	.019"			Coverage							50	5.8	19.0
							BCCS			10.7Ω/M'							100	8.4	27.6
							97.0Ω/M'			35.1Ω/km							200	12.5	41.0
							318.2Ω/km										400	19.0	62.3
																	700	27.0	88.6
																	900	31.0	101.7
																	1000	34.0	111.5



RG-188A/U Type • 26 AWG Stranded (7x34) .020" Silver-plated Copper-covered Steel Conductor • SPC Braid Shield (96% Coverage)

TFE Teflon® Insulation • White TFE Tape Jacket

200°C VW-1	83269	—	100†	30.5	2.0	.9	26 AWG (7x34)	.058	1.47	SPC Braid	.098	2.49	50	69.5%	29.0	95.1	1	1.2	3.9
			500†	152.4	6.5	2.9	.020"			96% Shield							10	2.7	8.9
			1000†	304.8	12.0	5.5				Coverage							50	5.6	18.4
							SCCCS			8.5Ω/M'							100	8.3	27.2
							91.2Ω/M'			27.9Ω/km							200	12.0	39.4
							299.2Ω/km										400	17.5	57.4
																	700	23.7	77.8
																	900	27.3	89.6
																	1000	29.0	95.1

MIL-C-17D

RG-58/U Type • 20 AWG Solid .033" Bare Copper Conductor • Bare Copper Braid Shield (78% Coverage)

Polyethylene Insulation • Black PVC Jacket

80°C	9201	—	U-500	U-152.4	13.0	5.9	20 AWG (solid)	.116	2.95	BC Braid	.193	4.90	51.5	66%	28.5	93.5	1	.3	1.1
			500	152.4	11.5	5.2	.033"			78% Shield							10	1.1	3.6
			U-1000	U-304.8	25.0	11.4				Coverage							50	2.5	8.2
			1000	304.8	23.0	10.4	BC			5.5Ω/M'							100	3.8	12.5
							10.0Ω/M'			18.0Ω/km							200	5.6	18.4
							33.1Ω/km										400	8.4	27.6
																	700	11.7	38.4
																	900	13.7	44.9
																	1000	14.5	47.6

RG-58/U Type • 20 AWG Solid .033" Bare Copper Conductor • Duobond® II + Tinned Copper Braid Shield (55% Coverage)

Polyethylene Insulation • Black PVC Jacket

UL AWM Style 1354 (30V 60°C)	9310**	—	500	152.4	10.5	4.8	20 AWG (solid)	.114	2.90	Duobond II* + 55%	.193	4.90	50	66%	30.8	101.0	1	.5	1.5
			U-1000	U-304.8	22.0	10.0	.033"			TC Braid							10	1.4	4.6
			1000	304.8	21.0	9.5				Coverage							50	2.8	9.2
							BC			8.0Ω/M'							100	3.8	12.5
							9.4Ω/M'			24.4Ω/km							200	5.4	17.7
							28.6Ω/km										400	7.9	25.9
																	700	11.1	36.4
																	900	12.8	42.0
																	1000	13.9	45.6

BC = Bare Copper • BCCS = Bare Copper-covered Steel • DCR = DC Resistance • SCCCS = Silver-coated Copper-covered Steel • SPC = Silver-plated Copper • TC = Tinned Copper • TFE = Tetra Fluoroethylene
Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. **1-800-BELDEN-1**. Request quotations of RG/U cables not listed.

*Duobond II = Bonded Duofoil® (100% coverage) + aluminum braid (67% coverage).

**See Belden's website, www.belden.com, for connector information.

† May contain more than one piece, min. length of any one piece is 25 ft.

†† May contain more than one piece, min. length of any one piece is 100 ft. Length may vary ±10% from length shown.

Teflon is a DuPont trademark.

BELDEN

For more information, contact Belden Technical Support: **1-800-BELDEN-1** • www.belden.com

Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr

50 Ohm Transmission and Computer Cable

RG-58A/U Type

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

RG-58A/U Type • 20 AWG Stranded (19x32) .037" Tinned Copper Conductor • Tinned Copper Braid Shield (96% Coverage)

Foam Polyethylene Insulation • Black or White PVC Jacket

UL AWM Style 1354 (30V 80°C)	8219	NEC: CM CEC: CM	U-500 500 [▲] U-1000 [▲] 1000	U-152.4 152.4 U-304.8 304.8	13.5 13.0 27.0 26.0	6.1 6.0 12.3 11.8	20 AWG (19x32) .037" TC 8.8Ω/M' 28.9Ω/km	.114 2.90	2.90	TC Braid 96% Shield Coverage 4.1Ω/M' 13.4Ω/km	.194 4.93	4.93 53.5	53.5	73%	26.5 86.9	1 10 50 100 200 400 700 900 1000	.4 1.3 3.1 4.5 6.6 10.0 14.2 16.6 18.1	1.2 4.3 10.2 14.8 21.7 32.8 46.6 54.5 59.4
------------------------------------	-------------	--------------------------	--	--------------------------------------	------------------------------	----------------------------	---	--------------	------	---	--------------	--------------	------	-----	--------------	--	--	--

P-MSHA • SC-182/5**

*500 ft. and U-1000 ft. put-ups available in Black only. Black jacket suitable for Aerial (when supported by a messenger) and Outdoor applications.

RG-58A/U Type • 20 AWG Stranded (19x32) .037" Tinned Copper Conductor • Duobond® II* + Tinned Copper Braid Shield (55% Coverage)

Foam Polyethylene Insulation • Black PVC Jacket

UL AWM Style 1354 (30V 80°C)	9311**	NEC: CM CEC: CM	500 U-1000 1000	152.4 U-304.8 304.8	10.5 23.0 21.0	4.8 10.5 9.5	20 AWG (19x32) .037" TC 8.8Ω/M' 28.9Ω/km	.114 2.90	2.90	Duobond II* + 55% TC Braid 17.0Ω/M' 55.8Ω/km	.193 4.90	4.90 52	52	75%	26.0 85.3	1 10 50 100 200 400 700 900 1000	.5 1.5 2.9 4.0 5.7 8.5 12.2 14.5 15.8	1.6 4.9 9.5 13.1 18.7 27.9 40.0 47.6 51.8
------------------------------------	---------------	--------------------------	-----------------------	---------------------------	----------------------	--------------------	---	--------------	------	--	--------------	------------	----	-----	--------------	--	---	---

RG-58A/U Type • 20 AWG Stranded (19x33) .035" Tinned Copper Conductor • Tinned Copper Braid Shield (95% Coverage)

Polyethylene Insulation • Black PVC Jacket

75°C	8259	—	100 U-500 500 U-1000 1000	30.5 U-152.4 152.4 U-304.8 304.8	3.5 6.1 13.5 25.0 26.0	1.6 6.4 6.1 11.3 11.8	20 AWG (19x33) .035" TC 10.8Ω/M' 35.4Ω/km	.116 2.95	2.95	TC Braid 95% Shield Coverage 4.1Ω/M' 13.4Ω/km	.192 4.88	4.88 50	50	66%	30.8 101.0	1 10 50 100 200 400 700 900 1000	.4 1.5 3.7 5.4 8.1 12.4 17.7 21.1 22.8	1.4 4.9 12.1 17.7 26.6 40.7 58.1 69.2 74.8
------	-------------	---	---------------------------------------	--	------------------------------------	-----------------------------------	--	--------------	------	---	--------------	------------	----	-----	---------------	--	--	--

Suitable for Aerial (when supported by a messenger) and Outdoor applications.

RG-58A/U Type • 20 AWG Solid Bare Copper Conductor • Tinned Copper Braid Shield (95% Coverage)

Polyethylene Insulation • Black PVC Jacket

UL AWM Style 1354 (30V 80°C) VW-1	8240	NEC: CMX CEC: CMX	100 U-500 500 U-1000 1000	30.5 U-152.4 152.4 U-304.8 304.8	3.6 6.4 5.9 12.3 11.8	1.6 6.4 5.9 12.3 11.8	20 AWG (solid) .033" BC 10.0Ω/M' 32.8Ω/km	.116 2.95	2.95	TC Braid 95% Shield Coverage 4.1Ω/M' 13.4Ω/km	.193 4.90	4.90 51.5	51.5	66%	28.5 93.5	1 10 50 100 200 400 700 900 1000	.3 1.1 2.5 3.8 5.6 8.4 11.7 13.7 14.5	1.1 3.6 8.2 12.5 18.4 27.6 38.4 44.9 47.6
--	-------------	----------------------------	---------------------------------------	--	-----------------------------------	-----------------------------------	--	--------------	------	---	--------------	--------------	------	-----	--------------	--	---	---

Suitable for Aerial (when supported by a messenger) and Outdoor applications.

Plenum • FEP Teflon® Insulation • Black FEP Teflon Jacket

200°C	88240	NEC: CMP CEC: CMP FT6	500 [†] 1000 [†]	152.4 304.8	12.0 24.0	5.4 10.9	20 AWG (solid) .032" BC 10.2Ω/M' 33.5Ω/km	.107 2.72	2.72	TC Braid 95% Shield Coverage 6.7Ω/M' 22.0Ω/km	.159 4.04	4.04 53.5	53.5	69.5%	26.4 86.6	1 10 50 100 200 400 700 900 1000	.5 1.2 3.0 4.3 6.4 9.7 13.7 16.1 17.3	1.6 3.9 9.8 14.2 21.0 31.7 45.0 52.8 56.6
-------	--------------	--------------------------------	---------------------------------------	----------------	--------------	-------------	--	--------------	------	---	--------------	--------------	------	-------	--------------	--	---	---

Plenum • FEP Teflon Insulation • Natural Flamarrest® Jacket

75°C	82240	NEC: CMP CEC: CMP FT6	U-500 [†] 1000 [†]	U-152.4 304.8	13.5 26.0	6.1 11.8	20 AWG (solid) .032" BC 10.2Ω/M' 33.5Ω/km	.107 2.72	2.72	TC Braid 95% Shield Coverage 6.7Ω/M' 22.0Ω/km	.159 4.04	4.04 53.5	53.5	69.5%	26.4 86.6	1 10 50 100 200 400 700 900 1000	.5 1.2 3.0 4.3 6.4 9.7 13.7 16.1 17.3	1.6 3.9 9.8 14.2 21.0 31.7 45.0 52.8 56.6
------	--------------	--------------------------------	---	------------------	--------------	-------------	--	--------------	------	---	--------------	--------------	------	-------	--------------	--	---	---

BC = Bare Copper • DCR = DC Resistance • FEP = Fluorinated Ethylene Propylene • TC = Tinned Copper

*Duobond II = Bonded Duofoil® (100% coverage) + aluminum braid (67% coverage).

**Pennsylvania Department of Environmental Resource and United States Mine Safety and Health Administration certification.

†Spools and/or UnReel® cartons are one piece, but length may vary ±10% from length shown.

Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. **1-800-BELDEN-1**. Request quotation of RG/U cables not listed.

See Belden's website, www.belden.com, for connector information.

Teflon is a DuPont trademark.



For more information, contact **Belden Technical Support: 1-800-BELDEN-1 • www.belden.com**

Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr

50 Ohm Transmission and Computer Cable

RG-8X and RG-8/U Type

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

RG-8X Type • 16 AWG Stranded (19x29) .058" Bare Copper Conductor • Bare Copper Braid Shield (95% Coverage)

Gas-injected FPE Insulation • Black PVC Jacket

UL AWM	9258	NEC:	U-500	U-152.4	20.0	9.1	16 AWG	.155	3.94	BC Braid	.242	6.15	50	82%	24.8	75.6	1	.3	1.0
Style 1354		CM	500	152.4	18.5	8.4	(19x29)			95% Shield							10	.9	3.0
(30V 80°C)		CEC:	U-1000	U-304.8	39.0	17.7	.058"			Coverage							50	2.1	6.9
		CM	1000	304.8	40.0	18.2	BC			3.3Ω/M'							100	3.1	10.2
							4.3Ω/M'			10.8Ω/km							200	4.5	14.8
						14.1Ω/km										400	6.6	21.7	
																700	9.1	29.9	
																900	10.7	35.1	
																1000	11.2	36.7	

*1000 ft. put-up also available in White.
Suitable for Outdoor and Aerial applications.

RG-8/U Type • 13 AWG Stranded (7x21) .085" Bare Copper Conductor • Bare Copper Braid Shield (97% Coverage)

Polyethylene Insulation • Black PVC Jacket

75°C	8237	NEC:	100	30.5	13.6	6.2	13 AWG	.285	7.24	BC Braid	.405	10.29	52	66%	28.5	93.5	1	.2	.5
		CMH	500	152.4	58.0	26.3	(7x21)			97% Shield							10	.6	1.8
		CEC:	1000	304.8	114.0	51.7	.085"			Coverage							50	1.3	4.3
		CMH FT1					BC			1.2Ω/M'							100	1.9	6.2
							1.9Ω/M'			3.9Ω/km							200	2.8	9.2
						6.2Ω/km										400	4.2	13.8	
																700	5.9	19.4	
																900	6.9	22.6	
																1000	7.4	24.3	
																4000	23.2	76.1	

JAN-C-17A
Suitable for Outdoor and Aerial applications.

Polyethylene Insulation • Black Non-contaminating PVC Jacket

UL AWM	9251	NEC:	500	152.4	58.0	26.3	13 AWG	.285	7.24	BC Braid	.405	10.29	52	66%	28.5	93.5	1	.2	.5
Style 1354		CMX	1000	304.8	115.0	52.3	(7x21)			97% Shield							10	.6	1.8
(30V 60°C)		CEC:					.085"			Coverage							50	1.3	4.3
		CMX					BC			1.2Ω/M'							100	1.9	6.2
							1.9Ω/M'			3.9Ω/km							200	2.8	9.2
						6.2Ω/km										400	4.2	13.8	
																700	5.9	19.4	
																900	6.9	22.6	
																1000	7.4	24.3	
																4000	23.2	76.1	

MIL-C-17D

RG-8/U Type • 11 AWG Stranded (7x19) .108" Bare Copper Conductor • Bare Copper Braid Shield (97% Coverage)

Foam Polyethylene Insulation • Black PVC Jacket

UL AWM	8214	NEC:	100	30.5	14.2	6.5	11 AWG	.285	7.24	BC Braid	.403	10.24	50	78%	26	85.3	1	.1	.5
Style 1354		CM	500	152.4	61.0	27.7	(7x19)			97% Shield							10	.5	1.7
(30V 80°C)		CEC:	1000	304.8	121.0	55.0	.108"			Coverage							50	1.2	3.9
		CM					BC			1.1Ω/M'							100	1.7	5.6
							1.2Ω/M'			3.6Ω/km							200	2.6	8.5
						3.9Ω/km										400	3.9	12.8	
																700	5.6	18.4	
																900	6.5	21.3	
																1000	7.0	23.0	
																4000	21.5	70.5	

Suitable for Outdoor and Aerial applications.

BC = Bare Copper • DCR = DC Resistance • FPE = Foam Polyethylene • HDPE = High-density Polyethylene • TC = Tinned Copper


Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. 1-800-BELDEN-1. Request quotations of RG/U cables not listed.

50 Ohm Transmission and Computer Cable**RG-8/U Type**

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

RG-8/U Type • 10 AWG Solid .108" Bare Copper Conductor • Duobond® II + Tinned Copper Braid Shield (90% Coverage)**Semi-solid Polyethylene Insulation • Black PVC Jacket**

Low Loss 80°C	9913	—	100	30.5	14.2	6.4	10 AWG	.286	7.26	Duobond II* + 90% TC Braid 1.8 Ω /M' 5.9 Ω /km	.405	10.29	50	84%	24.6	80.7	1	.3	1.0
			250	76.2	31.8	14.4	(solid)	10	.5								1.7		
			500	152.4	57.0	25.9	.108"	50	1.0								3.3		
			1000	304.8	116.0	52.6	BC	100	1.4								4.6		
							.9 Ω /M' 3.0 Ω /km	200	1.8								6.0		



For Plenum version of 9913, see 89913.

Suitable for Outdoor and Aerial applications.

Plenum • Semi-solid FEP Insulation • Black Fluorocopolymer Jacket

150°C	89913	NEC: CMP: CEC: CMP FT6	500†	152.4	63.0	28.6	10 AWG	.295	7.49	Duobond II* + 90% TC Braid 1.8 Ω /M' 5.9 Ω /km	.364	9.25	50	83%	25.0	82.0	1	.1	.3
			1000†	304.8	128.0	58.2	(solid)	10	.4								1.3		
							.108"	50	1.0								3.3		
							BC	100	1.6								5.2		
							.9 Ω /M' 3.0 Ω /km	200	2.3								7.5		

**RG-8/U Type • 10 AWG Stranded (7x19) .108" Bare Copper Conductor • Duobond II + Tinned Copper Braid Shield (95% Coverage)****Gas-injected Foam HDPE Insulation • Matte Black Belflex® Jacket**


Low Loss High-Flex 80°C	9913F7	—	100	30.5	12.5	5.7	10 AWG	.285	7.24	Duobond II* + 95% TC Braid 1.8 Ω /M' 5.9 Ω /km	.405	10.29	52	85%	22.5	80.7	1	.4	1.3
			250	76.2	27.8	12.6	(7x19)	10	.6								2.0		
			500	152.4	52.5	23.8	.108"	50	1.1								3.6		
			1000	304.8	104.0	47.2	BC	100	1.5								4.9		
							1.1 Ω /M' 3.7 Ω /km	200	2.0								6.6		



Suitable for Outdoor and Aerial applications.

RG-8/U Type • 10 AWG Solid .103" Bare Copper Conductor • Duobond II + Tinned Copper Braid Shield (95% Coverage)**Gas-injected Foam HDPE Insulation • Black PVC Jacket**

Low Loss UL AWM Style 1354 (30V 80°C)	9914	NEC: CMG: CEC: CMG FT4	500	152.4	56.0	25.4	10 AWG	.285	7.24	Duobond II* + 95% TC Braid 1.1 Ω /M' 3.6 Ω /km	.403	10.24	50	82%	24.8	81.4	1	.4	1.3
			1000	304.8	114.0	51.7	(solid)	10	.5								1.7		
							.103"	50	1.0								3.3		
							BC	100	1.4								4.6		
							1.8 Ω /M' 3.9 Ω /km	200	1.8								6.0		



Suitable for Outdoor and Aerial applications.

RG-8/U Type • 10 AWG Solid .108" Bare Copper Conductor • Duofoil® (100% Coverage) + Tinned Copper Braid Shield (90% Coverage)**Plenum • Foam FEP Insulation • Black Fluorocopolymer Jacket**

Low Loss 125°C	7733A	NEC: CMP: CEC: CMP FT6	500	152.4	53.5	24.3	10 AWG	.280	7.11	Duofoil + 90% TC Braid 1.8 Ω /M' 5.9 Ω /km	.355	9.01	50	84%	24.2	79.4	1	.1	.3
			1000	304.8	105.0	47.7	(solid)	10	.4								1.3		
							.108"	50	1.1								3.6		
							BC	100	1.5								4.9		
							.9 Ω /M' 3.0 Ω /km	200	2.1								6.9		



Suitable for Outdoor and Aerial applications.

BC = Bare Copper • DCR = DC Resistance • FEP = Fluorinated Ethylene Propylene • HDPE = High-density Polyethylene • TC = Tinned Copper

Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. 1-800-BELDEN-1. Request quotations of RG/U cables not listed.


*Duobond II = Bonded Duofoil (100% coverage) + aluminum braid (67% coverage).

†Spools are one piece, but length may vary \pm 10% from length shown.


50 Ohm Transmission Cable

Electrical Characteristics of 9913, 9913F7 and 9914

Attenuation

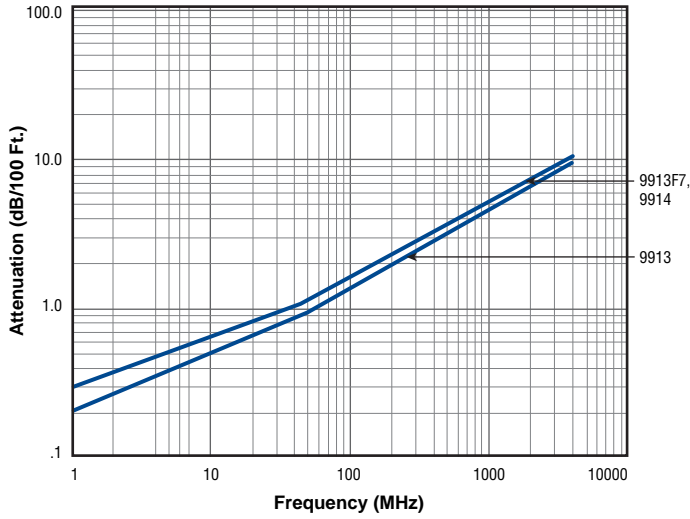

Power Rating

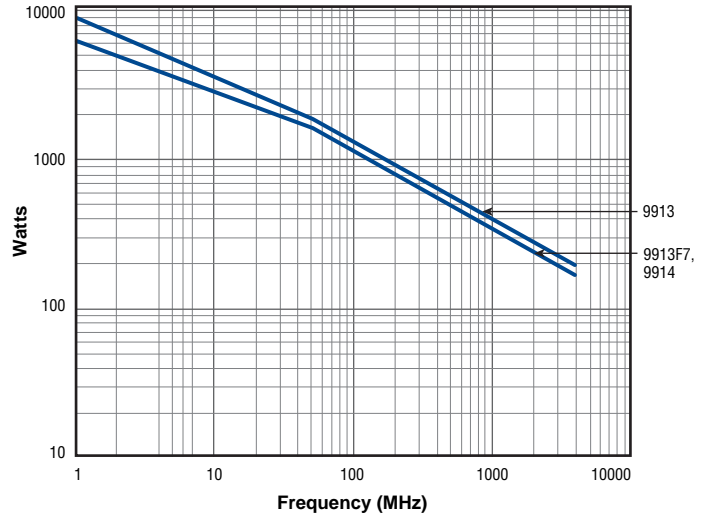

Conformable® Coax Cable**50 Ohm Microwave Cables**

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

M17/151 Type • 29 AWG Solid .011" Silver-plated Copper-covered Steel Conductor • Copper-Tin Composite Shield (100% Coverage)**TFE Teflon® Insulation • Unjacketed**

UL AWM	1674A*	—	50	15.2	.2	.1	29 AWG	.034	.85	CT	.047	1.19	50	69.5%	29.5	96.8	500	25.0	82.0
Style 10245 (30V 105°C)			100	30.5	.4	.2	(solid)			Composite							1000	36.7	120.3
			500	152.4	2.0	.9	.011"			100% Shield							2000	53.8	176.5
			1000	304.8	5.0	2.3	SPCCS			Coverage							3000	67.3	220.8
							205.0Ω/M'			8.0Ω/M'							5000	89.2	292.8
							672.4Ω/km			26.2Ω/km							7000	107.5	352.6
																	10000	130.9	429.5
																	15000	163.8	537.4
																	18000	181.1	594.3
																	20000	192.0	630.0

**M17/151 Type • 29 AWG Solid .011" Silver-plated Copper Conductor • Copper-Tin Composite Shield (100% Coverage)****TFE Teflon Insulation • Unjacketed**

UL AWM	1674B*	—	100††	30.5	.4	.2	29 AWG	.034	.85	CT	.047	1.19	50	69.5%	29.5	96.8	500	25.0	82.0
Style 10245 (30V 105°C)			500††	152.4	2.0	.9	(solid)			Composite							1000	36.7	120.3
			1000††	304.8	5.0	2.3	.011"			100% Shield							2000	53.8	176.5
							SPC			Coverage							3000	67.3	220.8
							81.2Ω/M'			8.0Ω/M'							5000	89.2	292.8
							266.4Ω/km			26.2Ω/km							7000	107.5	352.6
																	10000	130.9	429.5
																	15000	163.8	537.4
																	18000	181.1	594.3
																	20000	192.0	630.0

**RG-405/U Type • 24 AWG Solid .020" Silver-plated Copper-covered Steel Conductor • Copper-Tin Composite Shield (100% Coverage)****TFE Teflon Insulation • Unjacketed**

UL AWM	1671A*	—	50	15.2	2.0	.9	24 AWG	.062	1.57	CT	.085	2.16	50	69.5%	29.5	96.8	500	15.0	49.2
Style 10245 (30V 105°C)			100	30.5	2.5	1.1	(solid)			Composite							1000	22.2	72.8
			500†	152.4	7.5	3.4	.020"			100% Shield							2000	32.8	107.6
			1000†	304.8	14.0	6.4	SPCCS			Coverage							3000	41.2	135.2
							64.2Ω/M'			10.2Ω/M'							5000	54.9	180.1
							210.6Ω/km			33.5Ω/km							7000	66.4	217.9
																	10000	81.2	266.4
																	15000	102.0	334.7
																	18000	113.0	370.8
																	20000	120.0	393.7

Suitable for Outdoor applications.

TFE Teflon Insulation • PVC Jacket (Black or Clear)

UL AWM	1671J*	—	100††	30.5	2.9	1.3	24 AWG	.062	1.57	CT	.127	3.23	50	69.5%	29.5	96.8	500	15.0	49.2
Style 10245 (30V 105°C)			500†	152.4	9.5	4.7	(solid)			Composite							1000	22.2	72.8
			1000†	304.8	17.0	7.7	.020"			100% Shield							2000	32.8	107.6
							SPCCS			Coverage							3000	41.2	135.2
							64.2Ω/M'			10.2Ω/M'							5000	54.9	180.1
							210.6Ω/km			33.5Ω/km							7000	66.4	217.9
																	10000	81.2	266.4
																	15000	102.0	334.7
																	18000	113.0	370.8
																	20000	120.0	393.7

*100 ft. put-up available in Black only.

Suitable for Outdoor applications.

RG-405/U Type • 24 AWG Solid .020" Silver-plated Copper Conductor • Copper-Tin Composite Shield (100% Coverage)**TFE Teflon Insulation • Unjacketed**

UL AWM	1671B	—	500††	152.4	7.0	3.2	24 AWG	.062	1.57	CT	.085	2.16	50	69.5%	29.5	96.8	500	15.0	49.2
Style 10245 (30V 105°C)			1000††	304.8	13.0	6.0	(solid)			Composite							1000	22.2	72.8
							.020"			100% Shield							2000	32.8	107.6
							SPC			Coverage							3000	41.2	135.2
							25.7Ω/M'			10.2Ω/M'							5000	54.9	180.1
							84.3Ω/km			33.5Ω/km							7000	66.4	217.9
																	10000	81.2	266.4
																	15000	102.0	334.7
																	18000	113.0	370.8
																	20000	120.0	393.7

Suitable for Outdoor applications.

CT = Copper-Tin • DCR = DC Resistance • SPC = Silver-plated Copper • SPCCS = Silver-coated Copper-covered Steel • TFE = Tetra Fluoroethylene

Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. **1-800-BELDEN-1**.

*Protected by one or more of U.S. Patent Nos. 4,694,122 and 5,292,001. Patent held in the U.S., Singapore, Australia, Germany, France and England. Patent pending in Japan.

†250 ft. put-up: Exact 3 pieces (maximum), 50 feet minimum length
 500 ft. put-up: Exact 5 pieces (maximum), 50 feet minimum length
 1000 ft. put-up: Exact 8 pieces (maximum), 50 feet minimum length

††May contain more than one piece. Min. length of any one piece is 25 ft.

Teflon is a Dupont trademark.

BELDENFor more information, contact **Belden Technical Support: 1-800-BELDEN-1 • www.belden.com****Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr**

Conformable® Coax Cable

50 Ohm Microwave Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

RG-402/U Type • 19 AWG Solid .036" Silver-plated Copper-covered Steel Conductor • Copper-Tin Composite Shield (100% Coverage)

TFE Teflon® Insulation • Unjacketed

UL AWM	1673A*	—	50	15.2	3.3	1.5	19 AWG	.116	2.95	CT	.138	3.51	50	69.5%	29.5	96.8	500	8.0	26.2
Style 10245 (30V 105°C)			100	30.5	3.9	1.8	(solid)			Composite							1000	12.0	39.4
			250†	76.2	8.0	3.6	.036"			100% Shield							2000	18.1	59.4
			500	152.4	15.0	6.8	SPCCS			Coverage							3000	22.9	75.1
							20.5Ω/M'			4.5Ω/M'							5000	31.0	101.7
							67.3Ω/km			14.8Ω/km							7000	37.8	124.0
																	10000	46.6	152.9
																	15000	59.1	193.9
																	18000	65.8	215.9
																	20000	70.0	229.7



TFE Teflon Insulation • Black PVC Jacket

UL AWM	1673J*	—	100	30.5	5.1	2.3	19 AWG	.116	2.95	CT	.178	4.52	50	69.5%	29.5	96.8	500	8.0	26.2
Style 10245 (30V 105°C)			500†	152.4	17.5	8.0	(solid)			Composite							1000	12.0	39.4
							.036"			100% Shield							2000	18.1	59.4
							SPCCS			Coverage							3000	22.9	75.1
							20.5Ω/M'			4.5Ω/M'							5000	31.0	101.7
							67.3Ω/km			14.8Ω/km							7000	37.8	124.0
																	10000	46.6	152.9
																	15000	59.1	193.9
																	18000	65.8	215.9
																	20000	70.0	229.7



RG-402/U Type • 19 AWG Solid .036" Silver-plated Copper Conductor • Copper-Tin Composite Shield (100% Coverage)

TFE Teflon Insulation • Unjacketed

UL AWM	1673B*	—	100††	30.5	3.9	1.8	19 AWG	.116	2.95	CT	.138	3.51	50	69.5%	29.5	96.8	500	8.0	26.2
Style 10245 (30V 105°C)			250††	76.2	8.0	3.6	(solid)			Composite							1000	12.0	39.4
			500††	152.4	14.5	6.6	.036"			100% Shield							2000	18.1	59.4
							SPC			Coverage							3000	22.9	75.1
							7.9Ω/M'			4.5Ω/M'							5000	31.0	101.7
							25.9Ω/km			14.8Ω/km							7000	37.8	124.0
																	10000	46.6	152.9
																	15000	59.1	193.9
																	18000	65.8	215.9
																	20000	70.0	229.7



RG-401/U Type • 14 AWG Solid .065" Silver-plated Copper Conductor • Copper-Tin Composite Shield (100% Coverage)

TFE Teflon Insulation • Unjacketed

UL AWM	1675A*	—	50†	15.2	4.1	1.8	14 AWG	.210	5.33	CT	.246	6.25	50	69.5%	29.6	97.1	400	3.8	12.5
Style 10245 (30V 105°C)			100††	30.5	8.1	3.7	(solid)			Composite							500	4.4	14.4
			250††	76.2	20.3	9.2	.065"			100% Shield							1000	6.8	22.3
			500††	152.4	40.5	18.4	SPC			Coverage							2000	10.4	34.1
							2.5Ω/M'			8.0Ω/M'							3000	13.4	44.0
							8.2Ω/km			26.2Ω/km							5000	18.5	60.7
																	7000	22.8	74.8
																	10000	28.4	93.2
																	15000	36.6	120.1
																	18000	41.0	134.5



CT = Copper-Tin • DCR = DC Resistance • SPCCS = Silver-plated Copper-covered Steel • SPC = Silver-plated Copper • TFE = Tetra Fluoroethylene

Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. **1-800-BELDEN-1**.

* Protected by one or more of U.S. Patent Nos. 4,694,122 and 5,292,001. Patent held in the U.S., Singapore, Australia, Germany, France and England. Patent pending in Japan.

† 250 ft. put-up: Exact 3 pieces (maximum), 50 feet minimum length

500 ft. put-up: Exact 5 pieces (maximum), 50 feet minimum length

1000 ft. put-up: Exact 8 pieces (maximum), 50 feet minimum length

†† May contain more than one piece, minimum length of any one piece is 25 ft.

Teflon is a DuPont trademark.

BELDEN

For more information, contact Belden Technical Support: **1-800-BELDEN-1** • www.belden.com

Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr

Conformable® Coax Cable

75 Ohm High-Frequency Video Cables

Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Nominal Core OD		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/ 100 Ft.	dB/ 100m

29 AWG Solid .011" Silver-coated Copper-covered Steel Conductor • Copper-Tin Composite Shield (100% Coverage)

TFE Teflon® Insulation • Unjacketed

UL AWM	1672A*	—	500 [†]	152.4	7.5	3.4	29 AWG	.062	1.58	CT	.087	2.21	75	69.5%	19.5	64.0	1	1.6	5.3
Style 10245 (30V 105°C)			1000 [†]	304.8	14.0	6.4	(solid) .011"			Composite 100% Shield							10	1.8	5.9
							SCCCS			Coverage							50	4.1	13.5
							205.0Ω/M'			10.0Ω/M'							100	6.5	21.3
							672.4Ω/km			32.8Ω/km							200	9.0	29.5
																	400	12.8	42.0
																	700	18.0	59.1
																	1000	22.1	72.5



TFE Teflon Insulation • PVC Jacket (Black or Clear)

UL AWM	1672J*	—	100 ^{††}	30.5	3.1	1.4	29 AWG	.062	1.58	CT	.127	3.23	75	69.5%	19.5	64.0	1	1.6	5.3
Style 10245 (30V 105°C)			500 ^{††}	152.4	9.5	4.3	(solid) .011"			Composite 100% Shield							10	1.8	5.9
			1000 [†]	304.8	17.0	7.7	SCCCS			Coverage							50	4.1	13.5
							205.0Ω/M'			10.0Ω/M'							100	6.5	21.3
							672.6Ω/km			32.8Ω/km							200	9.0	29.5
																	400	12.8	42.0
																	700	18.0	59.1
																	1000	22.1	72.5

*100 ft. put-up available in Clear only.

29 AWG Solid .011" Silver-plated Copper Conductor • Copper-Tin Composite Shield (100% Coverage)

TFE Teflon Insulation • Unjacketed

UL AWM	1672B*	—	100 ^{††}	30.5	2.5	1.1	29 AWG	.062	1.58	CT	.087	2.21	75	69.5%	19.5	64.0	1	1.6	5.3
Style 10245 (30V 105°C)			500 ^{††}	152.4	7.5	3.4	(solid) .011"			Composite 100% Shield							10	1.8	5.9
			1000 ^{††}	304.8	14.0	6.4	SPC			Coverage							50	4.1	13.5
							11.0Ω/M'			10.0Ω/M'							100	6.5	21.3
							36.1Ω/km			32.8Ω/km							200	9.0	29.5
																	400	12.8	42.0
																	700	18.0	59.1
																	1000	22.1	72.5

Non-ferrous design.

CT = Copper Tin • DCR = DC Resistance • SCCC = Silver-coated Copper-covered Steel • SPC = Silver-plated Copper • TFE = Tetra Fluoroethylene

Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. **1-800-BELDEN-1**.

* Protected by one or more of U.S. Patent Nos. 4,694,122 and 5,292,001. Patent held in the U.S., Singapore, Australia, Germany, France and England. Patent pending in Japan.

[†] 250 ft. put-up: Exact 3 pieces (maximum), 50 feet minimum length

500 ft. put-up: Exact 5 pieces (maximum), 50 feet minimum length

1000 ft. put-up: Exact 8 pieces (maximum), 50 feet minimum length

^{††} May contain more than 1 piece, minimum length of any one piece is 25 ft.

Teflon is a DuPont trademark.

BELDEN


For more information, contact Belden Technical Support: **1-800-BELDEN-1** • www.belden.com

Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr


Conformable® Coax Cable

Electrical Characteristics


Attenuation

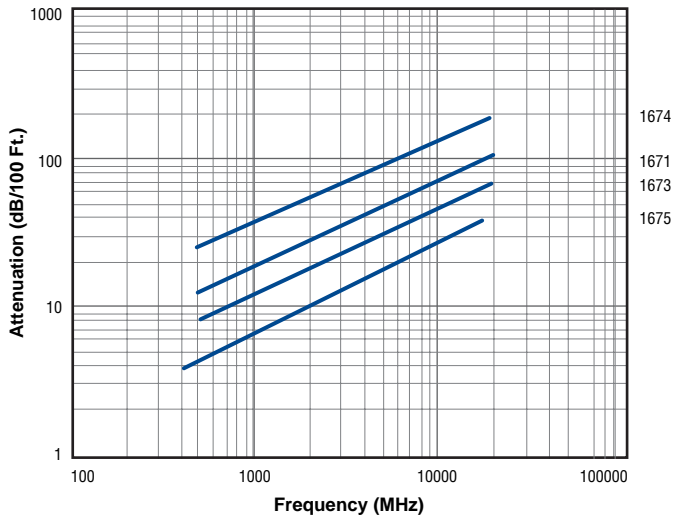


Power Rating

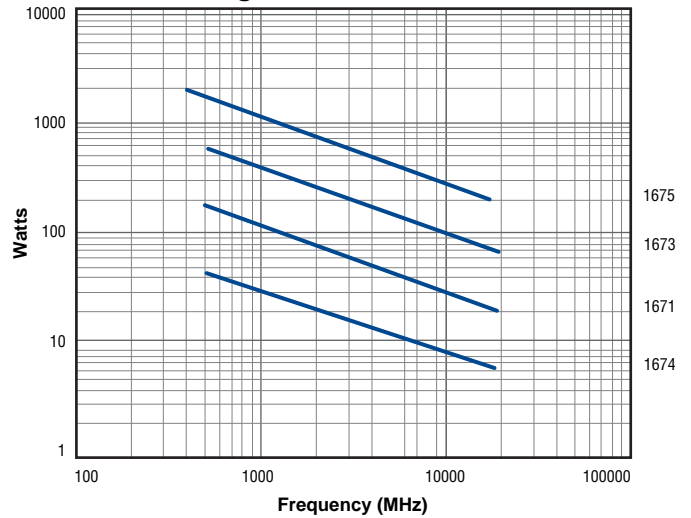

Guaranteed VSWR

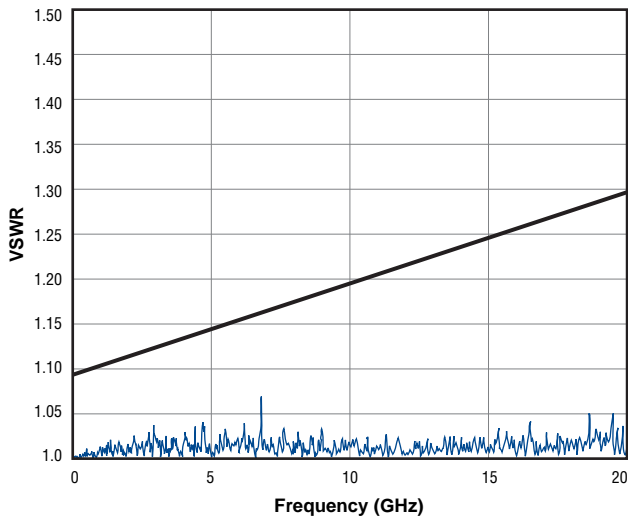

Phase Stability

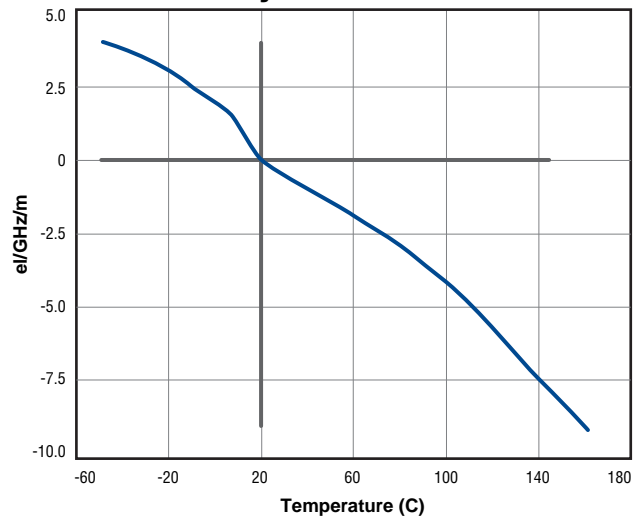

Conformable Coax cable is an alternative to semi-rigid and flexible coax for "black box" applications involving internal, head-end wiring of electronic equipment, delay lines, and high-frequency applications.

Standard Analog Video Cable

75 Ohm High-Frequency Cables

Conformable® Coax Cable



Description	Part No.	UL NEC/ C(UL) CEC Type	Standard Lengths		Standard Unit Weight		Conductor (stranding) Diameter Nom. DCR	Insulation Diameter		Shielding Materials Nom. DCR	Nominal OD		Nom. Imp. (Ω)	Nom. Vel. of Prop.	Nominal Capacitance		Nominal Attenuation		
			Ft.	m	Lbs.	kg		Inch	mm		Inch	mm			pF/Ft.	pF/m	MHz	dB/100 Ft.	dB/100m

29 AWG Solid .011" Silver-coated Copper-covered Steel Conductor • Copper-Tin Composite Shield (100% Coverage)**TFE Teflon® Insulation • Unjacketed**

UL AWM	1672A*	—	500 ^{††}	152.4	7.5	3.4	29 AWG	.062	1.57	CT	.087	2.21	75	69.5%	19.5	64.0	1	1.6	5.3
Style 10245			1000 ^{††}	304.8	14.0	6.4	(solid)			Composite							10	1.8	5.9
(30V 105°C)							.011"			100% Shield							50	4.1	13.5
(1500V RMS 200°C non-UL)							SCCCS			Coverage							100	6.5	21.3
							205.0Ω/M'			10.0Ω/M'							200	9.0	29.5
							672.4Ω/km			33.5Ω/km							400	12.8	42.0
																	700	18.0	59.1
																	1000	22.1	72.5

**TFE Teflon Insulation • PVC Jacket (Black or Clear)**

UL AWM	1672J*	—	100 ^{†*}	30.5	3.1	1.4	29 AWG	.062	1.57	CT	.127	3.23	75	69.5%	19.5	64.0	1	1.6	5.3
Style 10245			500 [†]	152.4	9.5	4.3	(solid)			Composite							10	1.8	5.9
(30V 105°C)			1000 ^{††}	304.8	17.0	7.7	.011"			100% Shield							50	4.1	13.5
(1500V RMS 200°C non-UL)							SCCCS			Coverage							100	6.5	21.3
							205.0Ω/M'			10.0Ω/M'							200	9.0	29.5
							672.4Ω/km			33.5Ω/km							400	12.8	42.0
																	700	18.0	59.1
																	1000	22.1	72.5



*100 ft. put-up available in Clear only.

29 AWG Solid .011" Silver-plated Copper Conductor • Copper-Tin Composite Shield (100% Coverage)**TFE Teflon Insulation • Unjacketed**

UL AWM	1672B*	—	100 [†]	30.5	2.5	1.1	29 AWG	.062	1.57	CT	.087	2.21	75	69.5%	19.5	64.0	1	1.2	3.9
Style 10245			500 [†]	152.4	7.5	3.4	(solid)			Composite							10	1.8	5.9
(30V 105°C)			1000 [†]	304.8	14.0	6.4	.011"			100% Shield							50	4.1	13.5
(1500V RMS 200°C non-UL)							SPC			Coverage							100	6.5	21.3
							11.0Ω/M'			10.0Ω/M'							200	9.0	29.5
							36.9Ω/km			33.5Ω/km							400	12.8	42.0
																	700	18.0	59.1
																	1000	22.1	72.5

**Non-ferrous design**

CT = Copper Tin • DCR = DC Resistance • SCCC = Silver-coated Copper-covered Steel • SPC = Silver-plated Copper

Contact the Belden Customer Service Department for a Comprehensive Connector Cross Reference. **1-800-BELDEN-1**.

*Protected by one or more of U.S. Patent Nos. 4,694,122 and 5,292,001. Patent held in the U.S., Singapore, Australia, Germany, France and England. Patent pending in Japan.

†May contain more than one piece. Minimum length of any one piece is 25 ft.

††500 ft. put-up: Exact 5 pieces (maximum), 50 feet minimum length

1000 ft. put-up: Exact 8 pieces (maximum), 50 feet minimum length

Teflon is a DuPont trademark.

BELDENFor more information, contact Belden Technical Support: **1-800-BELDEN-1** • www.belden.com**Belden114@CableCon.kr / 0707-434-7704 / Fax. 02-744-0909 / www.CableCon.co.kr**